Tenth Edition

High Purity Solvents

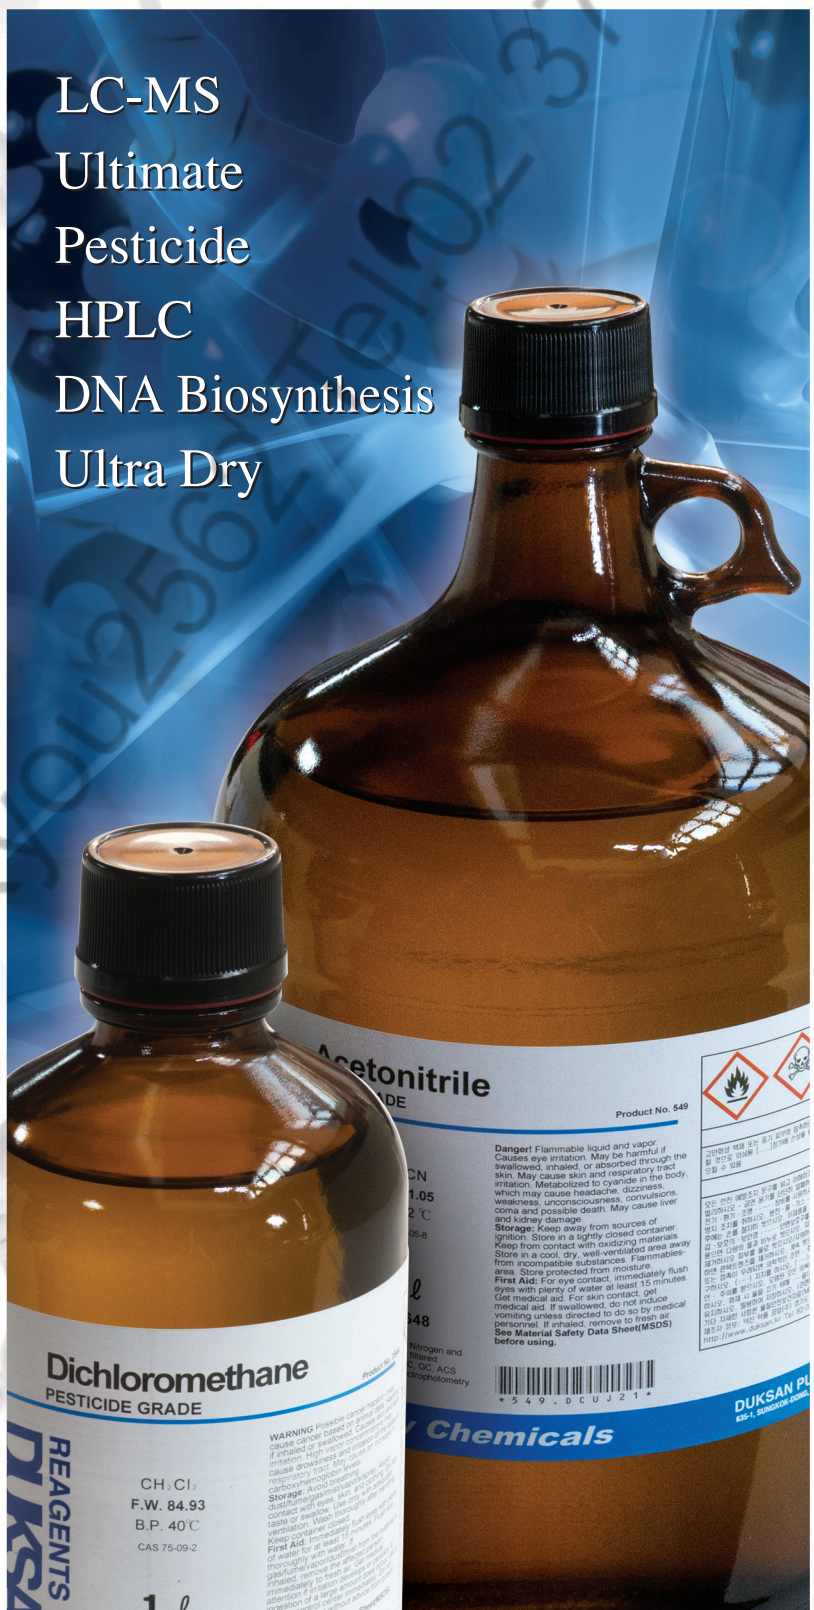

REAGENTS DUKSAN

DUKSAN PURE CHEMICALS

Greetings

Since its establishment in 1970,

DUKSAN Pure Chemicals has served customers as a supplier of analytical lab reagents for more than 40 years to contribute to the basic and fine chemicals industry.

We began our business by providing organic solvent recovery service and industrial grade raw materials. With our extensive knowledge and expertise in the field, we have successfully branched out into manufacture in first and special grade chemical reagents, food additives, pharmaceutical raw materials, high purity analytical reagents, electronic solvents, and ultra dry solvents for molecular biology.

As for chemical reagents, we provide the high purity reagents by organic and inorganic syntheses, and critical point organic solvent recovery technology. In result of continuous efforts of R&D, our products are produced with genuine domestic technology. As for domestic consumption, Duksan products are competing shoulder to shoulder with foreign reagents in major corporations, small and large scale laboratories, and many Universities. Currently High Purity Solvents are sold in South Eastern Asia and Europe as our own brand. We also export our products as an OEM to global major corporations in North America and received outstanding reputations throughout the field.

We believe the expansion will allow us to elevate already-at-the-peak product quality further, to improve production processes, and to develop new products. With this plan Duksan family will re-assure ourselves of our motto "Customer Satisfaction" and will try our best to continue our presence at the top of Korean and furthermore of the world reagent industry.

Duksan Pure Chemicals Co., Ltd.

DUKSAN High Purity Solvents

As a major manufacturer of high purity solvents in Korea, having a specialties in solvent purification, DUKSAN Pure Chemicals is working hard toward achieving 'High Quality, High Customer-satisfaction' by enforcing strict quality management and new product development.

Since the development of Solvents for HPLC in 1996, DUKSAN has been producing a series of High Purity Solvents.

- **LC-MS** - for LC-MS Analysis
- **Ultimate** - Multi purpose solvents for trace organic residue analysis, HPLC
- **HPLC** - Solvents for HPLC and ACS experiments
- **Pesticide** - for Pesticide Residue Analysis
- **BIO** - Solvents for Bio-synthesis
- **Ultra Dry** - for requiring Low water application

REAGENTS
DUKSAN
DUKSAN PURE CHEMICALS CO., LTD.

Contents

LC-MS
Ultimate
Pesticide
HPLC
Bio
Ultra Dry

LC-MS

No LC-MS TIC signals higher than 100ppb Reserpine

Features

- No LC-MS TIC signals higher than
  50ppb Reserpine (ESI+mode)
  50ppb 4-Nitrophenol (ESI-mode)
- Very low metal concentration (<100ppb)
- Low particles

Applications

- LC-MS
- HPLC
- Spectrophotometry

Packaging

- 1ℓ, 4ℓ Glass bottle

Item

Acetonitrile
Methanol
Water

Ultimate solvents

Features

- Highest Quality !
- Multi purpose grade for HPLC, Trace organic analysis by GC-ECD/GC-FID & Spectrophotometry
- Minimal UV absorbance
- Low water, residue after evaporation
- Low organic impurities

Applications

- HPLC
- Trace organic analysis by GC-ECD / GC-FID
- Spectrophotometry
- Applications requiring ACS reagent-grade solvent

Packaging

- 1ℓ, 4ℓ Glass bottle

Item

Acetone
Acetonitrile
Benzene
Chloroform (stabilized with Amylene)
Chloroform (stabilized with Ethanol)
Dichloromethane
Ethyl Acetate
Ethyl Ether (stabilized with Ethanol)
n-Heptane 97 %
n-Heptane 99 %
n-Hexane 95 %
Isooctane
Methanol
Methyl t-Butyl Ether
n-Pentane
Petroleum Ether (35~60℃)
2-Propanol
Toluene

Pesticide solvents

Features

- Meets Extraction-Concentration Suitability test (GC-ECD)
- Low water content and residue after evaporation

Applications

- Pesticide Multi residue Analysis by GC-ECD
- Gas Chromatography

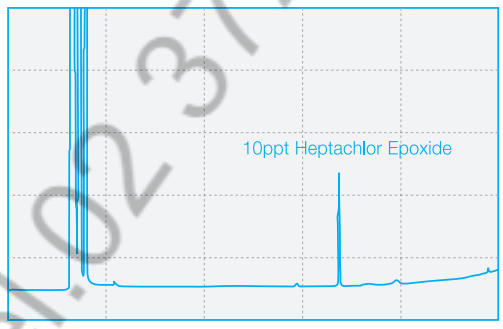

Packaging

- 1ℓ, 4ℓ Glass bottle

Item

Acetone
Acetonitrile
Benzene
1-Butanol
Chloroform (stabilized with Amylene)
Chloroform (stabilized with Ethanol)
Cyclohexane
Dichloromethane
Ethyl Acetate
Ethyl Ether (stabilized with Ethanol)
n-Heptane 97%
n-Heptane 99%
n-Hexane 95%
Isooctane
Methanol
Methyl t-Butyl ether
n-Pentane
Petroleum Ether (35~60℃)
2-Propanol
Sodium sulfate, Anhydrous
Toluene

HPLC solvents

Solvents

Features

- ACS Certified
- Low UV absorbance, High GC assay
- Low water content and residue after evaporation
- Packaged with Nitrogen & Sub-micron filtration

Applications

- HPLC
- Spectrophotometry
- Applications requiring ACS reagent-grade solvent

Packaging

- 1ℓ, 2.5ℓ, 4ℓ Glass bottle

Item

Acetic acid, glacial
Acetone
Acetonitrile
Acetonitrile, isocratic
Benzene
1–Butanol
n–Butyl acetate
Chlorobenzene
Chloroform(stabilized with Amylene)
Chloroform(stabilized with Ethanol)
Cyclohexane
o–Dichlorobenzene
1,2–Dichloroethane
Dichloromethane
N,N–Dimethyl Acetamide
N,N–Dimethylformamide
Dimethyl Sulfoxide
1,4–Dioxane
Ethanol

HPLC solvents

Item

- Ethyl Acetate
- Ethyl Ether (stabilized with Ethanol)
- n-Heptane 97%
- n-Heptane 97%
- n-Hexane 95%
- Isooctane
- Methanol
- Methanol, isocratic
- Methyl-t-Butyl Ether
- Methyl Ethyl Ketone
- Methyl Isobutyl Ketone
- N-Methyl-2-Pyrrolidone
- n-Pentane
- Petroleum Ether (35~60℃)
- 1-Propanol
- 2-Propanol
- Pyridine
- Tetrahydrofuran
- Tetrahydrofuran (stabilized with BHT)
- Toluene
- 1,2,4-Trichlorobenzene
- Water

Acid & Buffers for HPLC

Item

- Ammonium acetate
- Ammonium carbonate
- Ammonium phosphate, monobasic
- Phosphoric acid 85%
- Potassium phosphate, monobasic
- Sodium acetate trihydrate
- Sodium bicarbonate

Ion-Pair Reagents

Item

- 1-Dodecane Sulfonic acid Sodium salt
- 1-Heptane Sulfonic acid Sodium salt
- 1-Hexane Sulfonic acid Sodium salt
- 1-Octane Sulfonic acid Sodium salt
- 1-Pentane Sulfonic acid Sodium salt

BIO solvents

Features

- Specially purified for Bio synthesis
- Minimal water contents to optimize the yields in Bio synthesis
- Low water content and non-volatile residue

Applications

- Biosynthesis
  : nucleic acid & peptide synthesis
- Spectrophotometry
- Applications requiring Low-water solvent

Packaging

- 1ℓ, 4ℓ Glass bottle

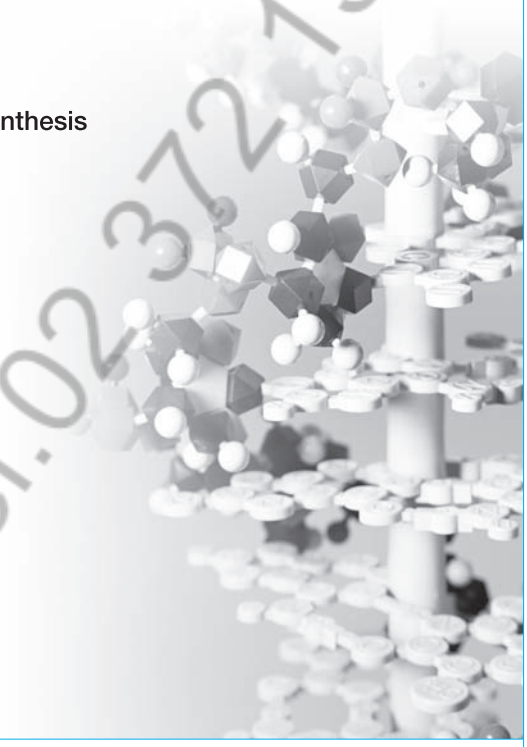

Item

Acetonitrile
Dichloromethane (stabilized with Amylene)
N.N - Dimethylformamide
Dimethyl Sulfoxide
Methanol
N-Methyl-2-Pyrrolidone
Pyridine
Tetrahydrofuran
Triethylamine

Ultra Dry solvents

Features

- Specially designed process for low water content
- Minimal water contents from 10 ppm to 50 ppm

Applications

- Biosynthesis
- Applications requiring Low-water solvent

Packaging

- 1ℓ, 4ℓ Glass bottle

Item

Acetonitrile (water10)
Acetonitrile (water 30)
Chloroform (stabilized with Ethanol)
1,4 - Dioxane
Ethyl Acetate
Ethyl ether (stabilized with Ethanol)
n-Hexane 95%
Methanol
Pyridine
Toluene

Solvent name Synonyms

LC-MS

Ultimate

Pesticide

HPLC

Bio

Ultra Dry

Solvent name synonyms

Solvent name	DUKSAN Product	CAS No.
Ammonium dihydrogen Phosphate	Ammonium phosphate, monobasic	7722-76-1
n-Butyl Alcohol	1-Butanol	71-36-3
2-Butanone	Methyl Ethyl Ketone	78-93-3
tert-Butyl Methyl Ether	Methyl t-Butyl Ether	1634-04-4
DCM	Dichloromethane	75-09-2
DMAC	N,N-Dimethylacetamide	127-19-5
DMF	N,N-Dimethylformamide	68-12-2
DMSO	Dimethyl Sulfoxide	67-68-5
1,2-Dichlorobenzene	o-Dichlorobenzene	95-50-1
Diethyl ether	Ethyl Ether	60-29-7
Diethylene Dioxide	1,4-Dioxane	123-91-1
Diethylene Ether	1,4-Dioxane	123-91-1
Ether	Ethyl Ether	60-29-7
Ethyl Alcohol	Ethanol	64-17-5
Ethyl Methyl Ketone	Methyl Ethyl Ketone	78-93-3
Ethylene Dichloride	1,2-Dichloroethane	107-06-2
Isopropanol	2-Propanol	67-63-0
Isopropyl Alcohol	2-Propanol	67-63-0
MEK	Methyl Ethyl Ketone	78-93-3
MIBK	Methyl Isobutyl Ketone	108-10-1
MTBE	Methyl t-Butyl Ether	1634-04-4
Methyl Alcohol	Methanol	67-56-1
Methyl Cyanide	Acetonitrile	75-05-8
Methylene Chloride	Dichloromethane	75-09-2
4-Methyl-2-Pentanone	Methyl Isobutyl Ketone	108-10-1
1-Methyl-2-Pyrrolidinone	N-Methyl-2-Pyrrolidone	872-50-4
N-Methyl-2-Pyrrolidinone	N-Methyl-2-Pyrrolidone	872-50-4
N-Methylpyrrolidone	N-Methyl-2-Pyrrolidone	872-50-4
1-Methyl-2-Pyrrolidone	N-Methyl-2-Pyrrolidone	872-50-4
Methyl Sulfoxide	Dimethyl Sulfoxide	67-68-5
Monochlorobenzene	Chlorobenzene	108-90-7
NMP	N-Methyl-2-Pyrrolidone	872-50-4
n-Propyl Alcohol	1-Propanol	71-23-8

Solvent name synonyms

Solvent name	DUKSAN Product	CAS No.
n-Propanol	1-Propanol	71-23-8
Potassium dihydrogen phosphate	Potassium phosphate, monobasic	7778-77-0
Sodium hydrogen carbonate	Sodium bicarbonate	144-55-8
TEA	Trietylamine	121-44-8
THF	Tetrahydrofuran	109-99-9
TMP	Isooctane	540-84-1
2,2,4-Trimethylpentane	Isooctane	540-84-1

DSP LC-MS

Item	LC-MS Suitability		Metal impurities		
	ESI +, Reserpine (max. ppb)	ESI −, 4-Nitrophenol (max. ppb)	Na (ppb)	Al, Ca, Mg, K (ppb)	Ba, Cd, Cr, Co, Cu, Fe Pb, Li, Ni, Sn, Zn (ppb)
Acetonitrile	50	50	50	25	5
Methanol	50	50	50	25	5
Water	50	50	50	25	5

Acetonitrile

LC-MS Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 3040

Specifications and Max. impurities

LC-MS Suitability

ESI+ mode(as Reserpine)	50 ppb
ESI- mode(as 4-Nitrophenol)	50 ppb
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.01 %
Residue after evapoartion	1 ppm
Titrable acid	0.008 meq/g
Titrable base	0.0006 meq/g
UltraViolet Spectrophotometry	
Maximum UV Absorbance	
190nm	1.00
195nm	0.15
200nm	0.05
205nm	0.04
210nm	0.02
220nm	0.01
254nm	0.005
LC Gradient Suitability	To Pass test

Metal impurities

Aluminum (Al)	25 ppb
Barium (Ba)	5 ppb
Cadmium (Cd)	5 ppb
Calcium (Ca)	25 ppb
Chromium (Cr)	5 ppb
Cobalt (Co)	5 ppb
Copper (Cu)	5 ppb
Iron (Fe)	5 ppb
Lead (Pb)	5 ppb
Magnesium (Mg)	25 ppb
Manganese (Mn)	5 ppb
Lithium (Li)	5 ppb
Nickel (Ni)	5 ppb
Potassium (K)	25 ppb
Siver (Ag)	5 ppb
Sodium (Na)*	50 ppb
Tin (Sn)	5 ppb
Zin (Zn)	5 ppb

* May change over time

Packaged under Nitrogen and sub-micron filtered.
For use in LC-MS, HPLC

1L x 10Btl/Box
4L x 4 Btl/Box

Methanol

LC-MS Grade

Formula : CH_3OH F.W. : 32.04 CAS : 67-56-1 Product No. : 3041

Specifications and Max. impurities

LC-MS Suitability

ESI+ mode(as Reserpine)	50 ppb
ESI- mode(as 4-Nitrophenol)	50 ppb
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.05 %
Residue after evapoartion	10 ppm
Titrable acid	0.0003 meq/g
Titrable base	0.0002 meq/g
UltraViolet Spectrophotometry	
Maximum UV Absorbance	
205nm	1.00
220nm	0.25
230nm	0.15
254nm	0.02
280nm	0.01
LC Gradient Suitability	To Pass test

Metal impurities

Aluminum (Al)	25 ppb
Barium (Ba)	5 ppb
Cadmium (Cd)	5 ppb
Calcium (Ca)	25 ppb
Chromium (Cr)	5 ppb
Cobalt (Co)	5 ppb
Copper (Cu)	5 ppb
Iron (Fe)	5 ppb
Lead (Pb)	5 ppb
Magnesium (Mg)	25 ppb
Manganese (Mn)	5 ppb
Lithium (Li)	5 ppb
Nickel (Ni)	5 ppb
Potassium (K)	25 ppb
Siver (Ag)	5 ppb
Sodium (Na)*	50 ppb
Tin (Sn)	5 ppb
Zin (Zn)	5 ppb

* May change over time

Packaged under Nitrogen and sub-micron filtered
For use in LC-MS, HPLC

1L x 10Btl/Box
4L x 4 Btl/Box

Water

LC-MS Grade

Formula : H_2O F.W. : 18.01 CAS : 7732-18-5 Product No. : 3042

Specifications and Max. impurities

LC-MS Suitability

ESI+ mode(as Reserpine)	50 ppb
ESI- mode(as 4-Nitrophenol)	50 ppb
Color (APHA)	10
Residue after evapoartion	10 ppm
UltraViolet Spectrophotometry	
Maximum UV Absorbance	
190nm	0.01
200nm	0.01
250 ~ 400nm	0.005
LC Gradient Suitability	To Pass test

Metal impurities

Aluminum (Al)	25 ppb
Barium (Ba)	5 ppb
Cadmium (Cd)	5 ppb
Calcium (Ca)	25 ppb
Chromium (Cr)	5 ppb
Cobalt (Co)	5 ppb
Copper (Cu)	5 ppb
Iron (Fe)	5 ppb
Lead (Pb)	5 ppb
Magnesium (Mg)	25 ppb
Manganese (Mn)	5 ppb
Lithium (Li)	5 ppb
Nickel (Ni)	5 ppb
Potassium (K)	25 ppb
Siver (Ag)	5 ppb
Sodium (Na)*	50 ppb
Tin (Sn)	5 ppb
Zin (Zn)	5 ppb

* May change over time

Packaged under Nitrogen and sub-micron filtered.
For use in LC-MS, HPLC

1L x 10Btl/Box
4L x 4 Btl/Box

Solvent name Synonyms

LC-MS

Ultimate

Pesticide

HPLC

Bio

Ultra Dry

Ultimate

Item	Extraction-Concentration Suitability ECD (max.ppt)	FID (max.ppt)	UV Cutoff (max. nm)	Assay (min. %)	Water (max. %)	Residue aft. evaporation (max. ppm)
Acetone	10	5	330	99.9	0.2	1
Acetonitrile	10	5	〈190	99.9	0.01	1
Benzene	10		280	99.9	0.03	1
Chloroform w/ Amylene	10	5	245	99.9	0.02	1
Chloroform w/ Ethanol	10	5	245	99.9	0.02	1
Dichloromethane	10	5	233	99.9	0.02	1
Ethyl Acetate	10	5	255	99.9	0.02	1
Ethyl Ether w/ Ethanol	10	5	218	99.9	0.01	1
n-Heptane 97%	10	5	197	97.0	0.02	1
n-Heptane 99%	10	5	197	99.0	0.02	1
n-Hexane 95%	10	5	195	95.0	0.02	1
Isooctane	10	5	205	99.8	0.02	1
Methanol	10	5	205	99.9	0.05	1
Methyl t-Butyl Ether	10	5	210	99.5	0.05	1
n-Pentane	10	5	190	98.0	0.02	1
Petroleum Ether (35~60℃)	10	5	-	-	0.01	1
2-Propanol	10	5	205	99.9	0.05	1
Toluene	10	5	286	99.9	0.02	1

Acetone

Ultimate Grade

Formula : $(CH_3)_2CO$ F.W. : 58.08 CAS : 67-64-1 Product No. : 1761

Physical Data

Eluotropic value (E°) (on Alumina)	0.56
Polarity Index (P')	5.1
Viscosity (cP, 25℃)	0.306
Density (g/㎖, 25℃)	0.785
Boiling Point (℃)	56
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.357

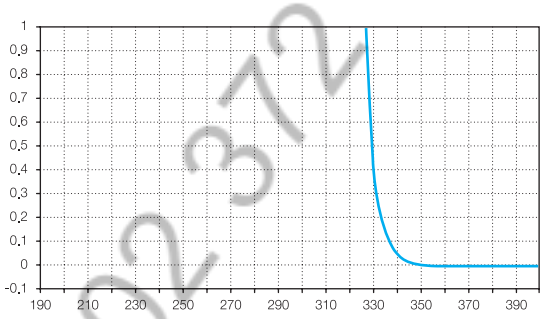

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
330 nm	1.00
340 nm	0.06
350 nm	0.01
UV Cutoff	max. 330 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.2 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Titrable acid	0.0003 mEq/g
Titrable base	0.0006 mEq/g
Solubility in water	To pass test
Substances reducing permanganate	To pass test
Aldehyde (as HCHO)	0.002 %
Methanol (as CH_3OH)	0.05 %
Isopropyl Alcohol (as $(CH_3)_2CHOH$)	0.05 %

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Acetonitrile

Ultimate Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 2675

Physical Data

Eluotropic value (E°) (on Alumina)	0.65
Polarity Index (P')	5.8
Viscosity (cP, 25℃)	0.369
Density (g/㎖, 25℃)	0.779
Boiling Point (℃)	82
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.342

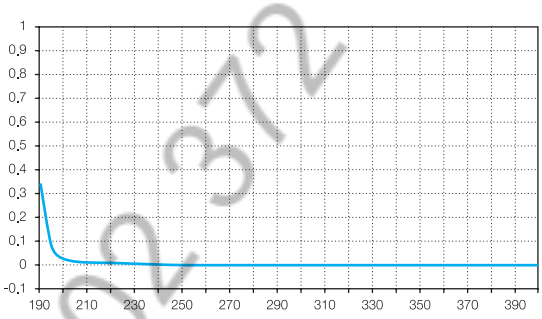

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance

190 nm	1.00
195 nm	0.15
200 nm	0.05
205 nm	0.04
210 nm	0.02
220 nm	0.01
254 nm	0.009
UV Cutoff	max. 190 nm

LC Gradient Suitability

Gradient Elution test	To pass test
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Titrable acid	0.008 mEq/g
Titrable base	0.0006 mEq/g

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Benzene

Ultimate Grade

Formula : C_6H_6 F.W. : 78.10 CAS : 71-43-2 Product No. : 1828

Physical Data

Eluotropic value (E°) (on Alumina)	0.32
Viscosity (cP, 25℃)	0.604
Density (g/㎖, 25℃)	0.872
Boiling Point (℃)	80
Solubility of water (%,25℃)	0.063
Refractive Index (25℃)	1.498

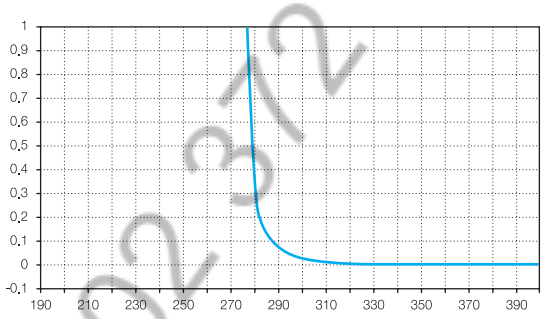

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt

Ultraviolet Spectrophotometry

Maximum UV Absorbance

280 nm	1.00
290 nm	0.15
300 nm	0.05
330 nm	0.01
350 nm	0.005
UV Cutoff	max. 280 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Substances darkened by sulfuric acid	To pass test
Thiophene (limit about 1 ppm)	To pass test
Sulfur compounds (as S)	0.005 %

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Chloroform
(Stabilized with Amylene)

Ultimate Grade

Formula : $CHCl_3$ F.W. : 119.38 CAS : 67-66-3 Product No. : 1779
Stabilized with 40~200 ppm Amylene

Physical Data

Eluotropic value (E°) (on Alumina)	0.40
Polarity Index (P')	4.1
Viscosity (cP, 25℃)	0.537
Density (g/mℓ, 25℃)	1.480
Boiling Point (℃)	61
Solubility of water (%,20℃)	0.056
Refractive Index (25℃)	1.444

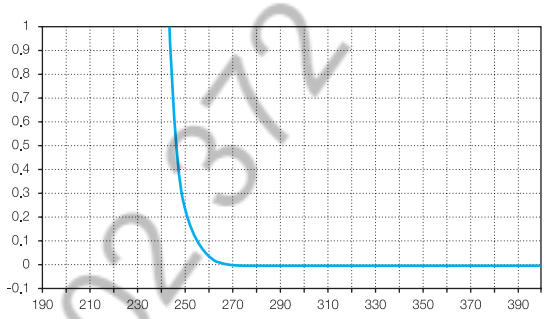

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
245 nm	1.00
250 nm	0.33
254 nm	0.15
270 nm	0.02
280 nm	0.01
UV Cutoff	max. 245 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Preservative (Amylene)	40 ~ 200 ppm
Lead (Pb)	0.05 ppm
Acid and Chloride	To pass test
Free Chlorine	To pass test
Suitability for use in Dithizone test	To pass test
Acetone and Aldehyde	0.005 %

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Chloroform
(Stabilized with Ethanol)

Ultimate Grade

Formula : $CHCl_3$ F.W. : 119.38 CAS : 67-66-3 Product No. : 1782
Stabilized with 0.5~1.0 % Ethanol

Physical Data

Eluotropic value (E°) (on Alumina)	0.40
Polarity Index (P')	4.1
Viscosity (cP, 25℃)	0.537
Density (g/㎖, 25℃)	1.480
Boiling Point (℃)	61
Solubility of water (%,20℃)	056
Refractive Index (25℃)	1.444

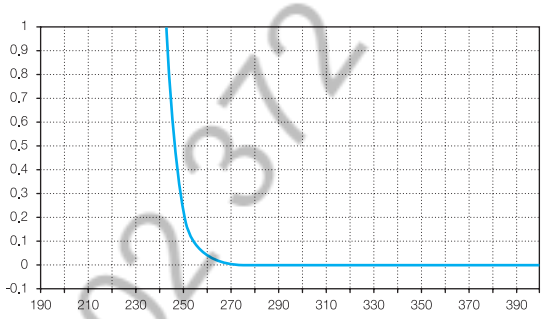

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
245 nm	1.00
250 nm	0.33
254 nm	0.15
270 nm	0.02
280 nm	0.01
UV Cutoff	max. 245 nm
Assay (by GC, Excluding preservative)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Preservative (Ethanol)	0.5 ~ 1.0 %
Lead (Pb)	0.05 ppm
Acid and Chloride	To pass test
Free Chlorine	To pass test
Substances darkened by sulfuric acid	To pass test
Suitability for use in Dithizone test	To pass test
Acetone and Aldehyde	0.005 %

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Dichloromethane
(Stabilized with Amylene)

Ultimate Grade

Formula : CH_2Cl_2 F.W. : 84.93 CAS : 75-09-2 Product No. : 1667
Stabilized with 40~200ppm Amylene

Physical Data

Eluotropic value (E°) (on Alumina)	0.42
Polarity Index (P')	3.1
Viscosity (cP, 25℃)	0.413
Density (g/㎖, 25℃)	1.318
Boiling Point (℃)	40
Solubility of water (%,20℃)	0.24
Refractive Index (25℃)	1.421

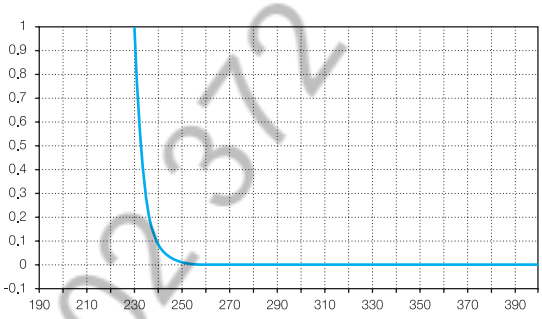

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance

233 nm	1.00
235 nm	0.50
240 nm	0.15
254 nm	0.01
280 nm	0.01
UV Cutoff	max. 233 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Backgroundt	To pass test
Preservative (Amylene)	40 ~ 200 ppm
Titrable acid	0.0003 mEq/g
Free Halogens	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Ethyl Acetate

Ultimate Grade

Formula : $CH_3COOC_2H_5$ F.W. : 88.11 CAS : 141-78-6 Product No. : 2697

Physical Data

Eluotropic value (E°) (on Alumina)	0.58
Polarity Index (P')	4.4
Viscosity (cP, 25℃)	0.423
Density (g/㎖, 25℃)	0.894
Boiling Point (℃)	77
Solubility of water (%,20℃)	3.3
Refractive Index (25℃)	1.370

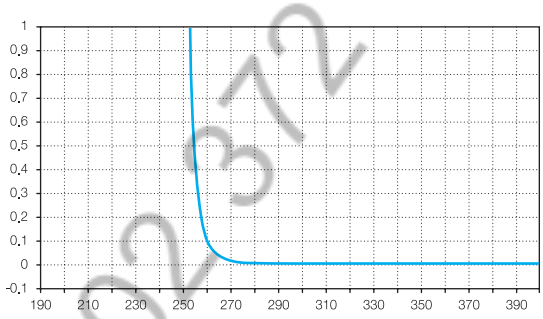

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
255 nm	1.00
260 nm	0.15
270 nm	0.025
UV Cutoff	max. 255 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Titrable acid	0.0009 mEq/g
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Ethyl Ether, Anhydrous
(Stabilized with Ethanol)

Ultimate Grade

Formula : $C_2H_5OC_2H_5$ F.W. : 74.12 CAS : 60-29-7 Product No. : 2691
Stabilized with 1.5~2.5 % Ethanol

Physical Data

Eluotropic value (E°) (on Alumina)	0.38
Polarity Index (P')	2.8
Viscosity (cP, 25℃)	0.24
Density (g/mℓ, 25℃)	0.708
Boiling Point (℃)	34
Solubility of water (%,20℃)	1.26
Refractive Index (25℃)	1.352

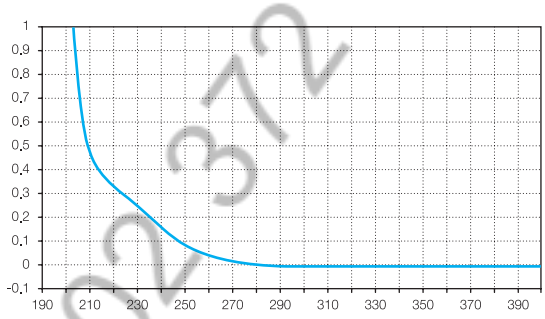

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
218 nm	1.00
254 nm	0.07
280 nm	0.02
350 nm	0.01
UV Cutoff	max. 218 nm
Assay (by GC, Excluding preservative)	min. 99.9 %
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Titrable acid	0.0002 mEq/g
Preservative (C_2H_5OH)	1.5 ~ 2.5 %
Peroxide (as H_2O_2, at time of packaging)	max. 5 ppm
Carbonyl compounds (as HCHO)	0.001 %
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

n-Heptane 97%

Ultimate Grade

Formula : $CH_3(CH_2)_5CH_3$ F.W. : 100.21 CAS : 142-82-5 Product No. : 2052

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 25℃)	0.40
Density (g/㎖, 25℃)	0.681
Boiling Point (℃)	98
Solubility of water (%,25℃)	0.01
Refractive Index (25℃)	1.385

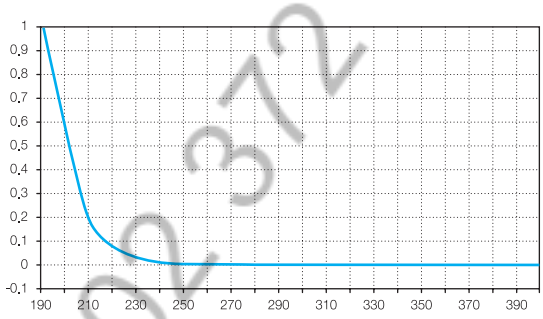

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm	1.00
200 nm	0.75
215 nm	0.20
254 nm	0.01
UV Cutoff	max. 197 nm
Assay (by GC, n-Heptane)	min. 97.0 %
(total C7 Hydrocarbons)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

n-Heptane 99%

Ultimate Grade

Formula : $CH_3(CH_2)_5CH_3$ F.W. : 100.21 CAS : 142-82-5 Product No. : 2702

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 25℃)	0.40
Density (g/mℓ, 25℃)	0.681
Boiling Point (℃)	98
Solubility of water (%,25℃)	0.01
Refractive Index (25℃)	1.385

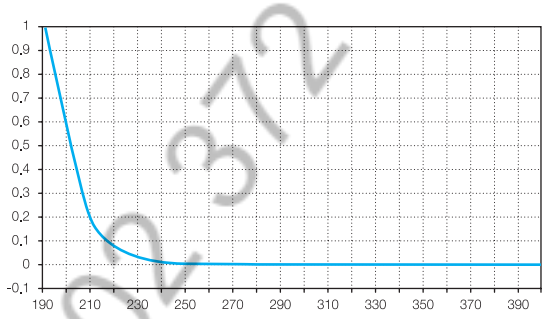

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm	1.00
200 nm	0.75
215 nm	0.20
254 nm	0.01
UV Cutoff	max. 197 nm
Assay (by GC, n-Heptane)	min. 99.0 %
(total C7 Hydrocarbons)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

n-Hexane 95%

Ultimate Grade

Formula : $CH_3(CH_2)_4CH_3$ F.W. : 86.18 CAS : 110-54-3 Product No. : 1666

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 25℃)	0.300
Density (g/㎖, 25℃)	0.656
Boiling Point (℃)	69
Solubility of water (%,20℃)	0.01
Refractive Index (25℃)	1.372

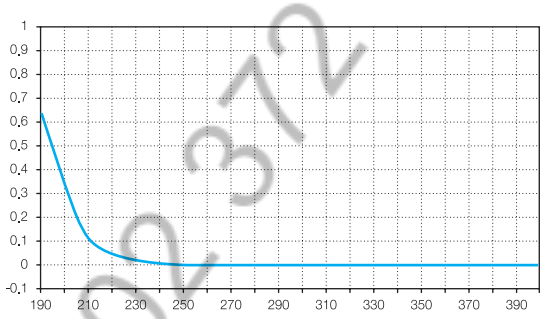

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
195 nm	1.00
210 nm	0.25
220 nm	0.075
254 nm	0.005
UV Cutoff	max. 195 nm
Assay (by GC, n-Hexane)	min. 95.0 %
(total C6 Hydrocarbons)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Water soluble titrable acid	0.0003 mEq/g
Sulfur compounds (as S)	0.005 %
Thiophene	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Isooctane
(2,2,4-Trimethylpentane)

Ultimate Grade

Formula : $(CH_3)_2CHCH_2C(CH_3)_3$ F.W. : 114.23 CAS : 540-84-1 Product No. : 1188

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 22℃)	0.51
Density (g/mℓ, 20℃)	0.691
Boiling Point (℃)	99
Solubility of water (%,20℃)	0.006
Refractive Index (25℃)	1.389

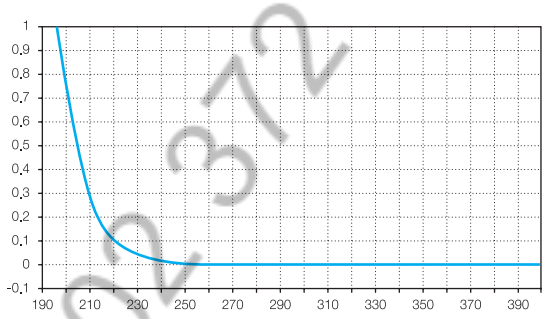

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm	1.00
225 nm	0.10
254 nm	0.014
UV Cutoff	max. 205 nm
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Water soluble titrable acid	0.0003 mEq/g
Sulfur compounds (as S)	0.005 %

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Methanol

Ultimate Grade

Formula : CH_3OH F.W. : 32.04 CAS : 67-56-1 Product No. : 2721

Physical Data

Eluotropic value (E°) (on Alumina)	0.95
Polarity Index (P')	5.1
Viscosity (cP, 25℃)	0.544
Density (g/㎖, 25℃)	0.787
Boiling Point (℃)	65
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.326

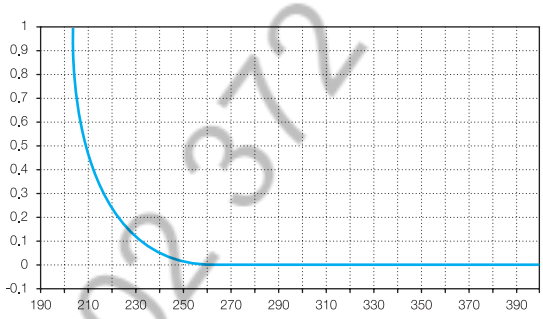

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance

205 nm	1.00
220 nm	0.25
230 nm	0.15
254 nm	0.02
280 nm	0.01
UV Cutoff	max. 205 nm

LC Gradient Suitability

Gradient Elution test	To pass test
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Titrable acid	0.0003 mEq/g
Titrable base	0.0002 mEq/g
Carbonyl compounds (each of Acetone, Formaldehyde and Acetaldehyde)	0.001 %
Substances darkened by sulfuric acid	To pass test
Substances reducing permanganate	To pass test
Solubility in water	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Methyl t-Butyl Ether

Ultimate Grade

Formula : $(CH_3)_3COCH_3$ F.W. : 88.14 CAS : 1634-04-4 Product No. : 2764

Physical Data

Eluotropic value (E°) (on Alumina)	0.35
Polarity Index (P')	2.5
Viscosity (cP, 25℃)	0.28
Density (g/mℓ, 20℃)	0.740
Boiling Point (℃)	55
Solubility of water (%,20℃)	1.5
Refractive Index (25℃)	1.366

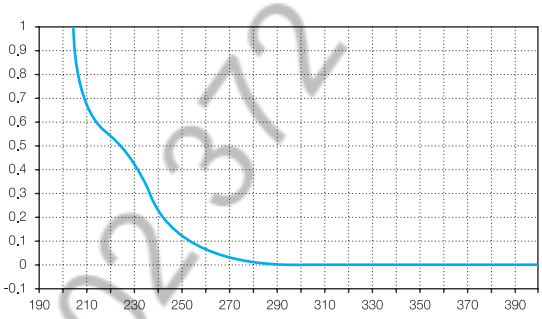

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance

210 nm	1.00
225 nm	0.50
254 nm	0.10
300 nm	0.01
UV Cutoff	max. 210 nm
Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Peroxide (as H_2O_2, at time of packaging)	max. 1 ppm

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

n-Pentane

Ultimate Grade

Formula : $CH_3(CH_2)_3CH_3$ F.W. : 72.15 CAS :109-66-0 Product No. : 2291

Physical Data

Eluotropic value (E°) (on Alumina)	0.00
Polarity Index (P')	0.00
Viscosity (cP, 25℃)	0.22
Density (g/㎖, 25℃)	0.621
Boiling Point (℃)	36
Solubility of water (%,20℃)	0.009
Refractive Index (25℃)	1.355

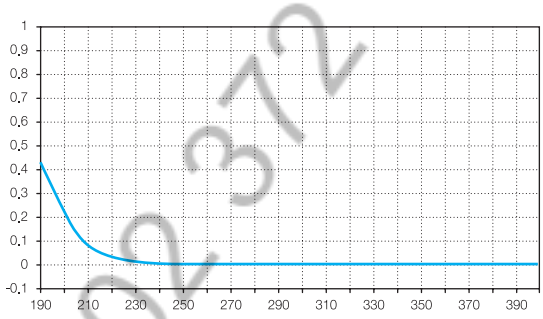

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
190 nm	1.00
200 nm	0.30
210 nm	0.10
254 nm	0.01
UV Cutoff	max. 190 nm
Assay (by GC, n-Pentane)	min. 98.0 %
(total C5 Hydrocarbons)	min. 99.9%
Color (APHA)	5
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Petroleum Ether (35~60℃)

Ultimate Grade

CAS : 8032-32-4 Product No. : 1593

Physical Data

Density (g/mℓ, 20℃)	0.64
Boiling Point (℃)	35 ~ 60
Refractive Index (20℃)	1.365

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb
Boiling range (Initial to dry point)	35 ~ 60℃
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Acidity	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

2-Propanol
(Isopropyl Alcohol)

Ultimate Grade

Formula : $(CH_3)_2CHOH$ F.W. : 60.10 CAS : 67-63-0 Product No. : 2377

Physical Data

Eluotropic value (E°) (on Alumina)	0.82
Polarity Index (P')	3.9
Viscosity (cP, 25℃)	2.038
Density (g/㎖, 25℃)	0.782
Boiling Point (℃)	82
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.375

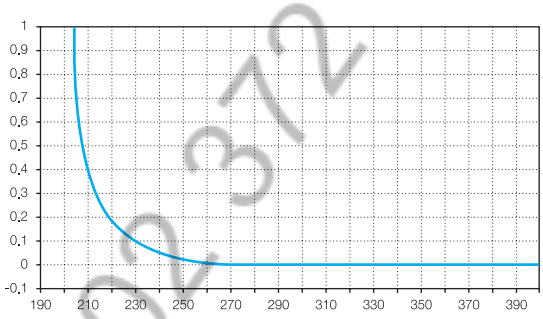

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm	1.00
220 nm	0.25
230 nm	0.13
254 nm	0.02
UV Cutoff	max. 205 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Titrable acid or Base	0.0001 mEq/g
Solubility in water	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Toluene

Ultimate Grade

Formula : $C_6H_5CH_3$ F.W. : 92.14 CAS : 108-88-3 Product No. : 1722

Physical Data

Eluotropic value (E°) (on Alumina)	0.29
Polarity Index (P')	2.4
Viscosity (cP, 25℃)	0.560
Density (g/mℓ, 25℃)	0.864
Boiling Point (℃)	111
Solubility of water (%,25℃)	0.033
Refractive Index (25℃)	1.494

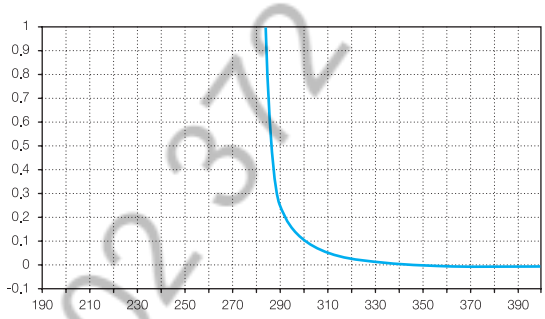

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
FID Detectable residue (as 2-Octanol)	max. 5 ppb

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
286 nm	1.00
288 nm	0.40
300 nm	0.10
350 nm	0.01
UV Cutoff	max. 286 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	1 ppm
Fluorescence Background	To pass test
Sulfur compounds (as S)	0.003 %
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
Multi purpose grade for HPLC, GC & Spectrophotometry
For use in Trace organic residue analysis

1L x 10Btl/Box
4L x 4 Btl/Box

Solvent name Synonyms
LC-MS
Ultimate
Pesticide
HPLC
Bio
Ultra Dry

Pesticide

Item	Extraction-Concentration Suitability - ECD (max.ppt)	Assay (min. %)	Water (max. %)	Residue aft. evaporation (max. ppm)
Acetone	10	99.8	0.25	5
Acetonitrile	10	99.8	0.05	5
Benzene	10	99.7	0.03	5
1-Butanol	20	99.5	0.1	5
Chloroform w/ Amylene	10	99.8	0.02	2
Chloroform w/ Ethanol	10	99.8	0.02	2
Cyclohexane	10	99.7	0.01	5
Dichloromethane	10	99.7	0.02	5
Ethyl Acetate	10	99.8	0.02	5
Ethyl Ether w/ Ethanol	10	99.5	0.08	3
n-Heptane 97%	10	97.0	0.02	3
n-Heptane 99%	10	99.0	0.02	3
n-Hexane 95%	10	95.0	0.01	5
Isooctane	10	99.0	0.01	5
Methanol	10	99.8	0.1	5
Methyl t-Butyl Ether	10	99.0	0.05	5
n-Pentane	10	98.0	0.02	5
Petroleum Ether (35~60℃)	10	-	0.05	5
2-Propanol	10	99.7	0.1	5
Sodium sulfate, anhydrous	-	99.0	-	-
Toluene	10	99.8	0.03	5

Acetone

Pesticide Grade

Formula : $(CH_3)_2CO$ F.W. : 58.08 CAS : 67-64-1 Product No. : 518

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.25 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Acetonitrile

Pesticide Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 1791

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Benzene

Pesticide Grade

Formula : C_6H_6 F.W. : 78.10 CAS : 71-43-2 Product No. : 981

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

1-Butanol
(n-Butyl Alcohol)

Pesticide Grade

Formula : $CH_3(CH_2)_3OH$ F.W. : 74.12 CAS : 71-36-3 Product No. : 1877

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.1 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Chloroform
(Stabilized with Amylene)

Pesticide Grade

Formula : $CHCl_3$ F.W. : 119.38 CAS : 67-66-3 Product No. : 1780
Stabilized with 40~200 ppm Amylene

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	2 ppm
Chloride (Cl)	10 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Chloroform
(Stabilized with Ethanol)

Pesticide Grade

Formula : $CHCl_3$ F.W. : 119.38 CAS : 67-66-3 Product No. : 1272
Stabilized with 0.5~1.0 % Ethanol

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, Excluding preservative)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	2 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Cyclohexane

Pesticide Grade

Formula : C_6H_{12} F.W. : 84.16 CAS :110-82-7 Product No. : 1332

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Dichloromethane
(Stabilized with Amylene)

Pesticide Grade

Formula : CH_2Cl_2 F.W. : 84.93 CAS : 75-09-2 Product No. : 580
Stabilized with 40~200ppm Amylene

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Chloride (Cl)	10 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Ethyl Acetate

Pesticide Grade

Formula : $CH_3COOC_2H_5$ F.W. : 88.11 CAS : 141-78-6 Product No. : 11

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Titrable acid	0.0009 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Ethyl Ether, Anhydrous
(Stabilized with Ethanol)

Pesticide Grade

Formula : $C_2H_5OC_2H_5$ F.W. : 74.12 CAS : 60-29-7 Product No. : 567
Stabilized with 1.5~2.5 % Ethanol

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC,Excluding preservative)	min. 99.5 %
Color (APHA)	10
Water	0.08 %
Residue after Evaporation	3 ppm
Peroxide (as H_2O_2, at time of packaging)	5 ppm
Titrable acid	0.0002 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

n-Heptane 97%

Pesticide Grade

Formula : $CH_3(CH_2)_5CH_3$ F.W. : 100.21 CAS : 142-82-5 Product No. : 2053

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, n-Heptane)	min. 97.0 %
(total C7 Hydrocarbons)	min. 99.9%
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	3 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

n-Heptane 99%

Pesticide Grade

Formula : $CH_3(CH_2)_5CH_3$ F.W. : 100.21 CAS : 142-82-5 Product No. : 2703

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, n-Heptane)	min. 99.0 %
(total C7 Hydrocarbons)	min. 99.9%
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	3 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

n-Hexane 95%

Pesticide Grade

Formula : $CH_3(CH_2)_4CH_3$ F.W. : 86.18 CAS : 110-54-3 Product No. : 821

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, n-Hexane)	min. 95.0 %
(total C6 Hydrocarbons)	min. 99.8 %
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Isooctane
(2,2,4-Trimethylpentane)

Pesticide Grade

Formula : $(CH_3)_2CHCH_2C(CH_3)_3$ F.W. : 114.23 CAS : 540-84-1 Product No. : 1187

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.0%
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Methanol

Pesticide Grade

Formula : CH_3OH F.W. : 32.04 CAS : 67-56-1 Product No. : 63

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.1 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Methyl t-Butyl Ether

Pesticide Grade

Formula : $(CH_3)_3COCH_3$ F.W. : 88.14 CAS : 1634-04-4 Product No. : 2765

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.0 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

n-Pentane

Pesticide Grade

Formula : $CH_3(CH_2)_3CH_3$ F.W. : 72.15 CAS :109-66-0 Product No. : 1576

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC, n-Pentane)	min. 98.0 %
(total C5 Hydrocarbons)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Petroleum Ether (35~60℃)

Pesticide Grade

CAS : 8032-32-4 Product No. : 1592

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Boiling range (Initial to dry)	35 ~ 60 ℃
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

2-Propanol
(Isopropyl Alcohol)

Pesticide Grade

Formula : $(CH_3)_2CHOH$ F.W. : 60.10 CAS : 67-63-0 Product No. : 861

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.1 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Sodium Sulfate, Anhydrous

Pesticide Grade

Formula : Na_2SO_4 F.W. : 142.04 CAS : 7757-82-6 Product No. : 315

Specifications and Max. impurities

Meets ACS Specification

Extraction-Concentration Suitability

Extraction-Concentration Suitability	To pass test
Assay (Na_2SO_4)	min. 99.0 %
Calcium (Ca)	0.01 %
Chloride (Cl)	0.001 %
Heavy Metals (Pb)	5ppm
Insoluble matters	0.01 %
Iron (Fe)	0.001 %
Loss on Ignition	0.5 %
Magnesium (Mg)	0.001 %
Nitrogen compound (as N)	5ppm
pH of a 5% Solution at 25℃	5.2 ~ 9.2
Phosphate (PO_4)	0.001 %
Potassium (K)	0.01 %

For use in Pesticide Residue analysis & general lab experiments

500g x 20Btl/Box, 1kg x 10Btl/Box

Toluene

Pesticide Grade

Formula : $C_6H_5CH_3$ F.W. : 92.14 CAS : 108-88-3 Product No. : 184

Specifications and Max. impurities

Extraction-Concentration Suitability

ECD Detectable residue (as Heptachlor epoxide)	max. 10 ppt
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Pesticide Residue analysis by GC-ECD

1L x 10Btl/Box
4L x 4 Btl/Box

Solvent name Synonyms
LC-MS
Ultimate
Pesticide
HPLC
Bio
Ultra Dry

DSP HPLC

Solvents

Item	UV Cutoff (max. nm)	Assay (min. %)	Water (max. %)	Residue aft. evaporation (max. ppm)
Acetic acid, glacial	254	99.7	0.1	5
Acetone	330	99.7	0.25	1
Acetonitrile	<190	99.9	0.01	1
Acetonitrile, isocratic	–	99.8	0.03	5
Benzene	280	99.7	0.03	5
1-Butanol	215	99.5	0.1	5
n-Butyl acetate	254	99.5	0.05	5
Chlorobenzene	288	99.9	0.03	5
Chloroform w/ Amylene	245	99.8	0.02	2
Chloroform w/ Ethanol	245	99.8	0.02	2
Cyclohexane	202	99.7	0.01	5
o-Dichlorobenzene	296	98.0	0.02	5
1,2-Dichloroethane	226	99.5	0.02	5
Dichloromethane	233	99.9	0.02	2
N,N-Dimethylacetamide	270	99.8	0.03	5
N,N-Dimethylformamide	270	99.9	0.03	5
Dimethyl Sulfoxide	263	99.9	0.05	5
1,4-Dioxane	215	99.8	0.02	5
Ethanol	205	99.9	0.1	5
Ethyl Acetate	255	99.9	0.02	5
Ethyl Ether w/ Ethanol	218	99.8	0.01	5
n-Heptane 97%	197	97.0	0.02	3
n-Heptane 99%	197	99.0	0.02	3
n-Hexane 95%	195	95.0	0.02	3
Isooctane	205	99.0	0.02	4
Methanol	205	99.9	0.05	3
Methanol, isocratic	–	99.7	0.05	5
Methyl t-Butyl Ether	210	99.0	0.05	5
Methyl Ethyl Ketone	329	99.6	0.03	3
Methyl Isobutyl Ketone	334	99.0	0.05	5
N-Methyl-2-Pyrrolidone	285	99.7	0.02	10
n-Pentane	190	98.0	0.02	5

DSP HPLC

Item	UV Cutoff (max. nm)	Assay (min. %)	Water (max. %)	Residue aft. evaporation (max. ppm)
Petroleum Ether (35~60℃)	210	-	0.01	5
1-Propanol	210	99.8	0.05	3
2-Propanol	205	99.9	0.05	2
Pyridine	330	99.5	0.02	5
Tetrahydrofuran	210	99.9	0.02	5
Tetrahydrofuran w/BHT	-	99.5	0.02	-
Toluene	286	99.8	0.02	5
1,2,4-Trichlorobenzene	310	99.0	0.01	5
Water	190	-	-	10

Acid & Buffers for HPLC

Item	UV Absobance (max., 254nm, 1.0M)	Assay (min. %)	Insoluble matter (max. %)
Ammonium acetate	0.02	99.0	0.005
Ammonium carbonate	0.02	30.0 (as NH_3)	0.005
Ammonium phosphate, monobasic	0.03	98.0	0.005
Phosphoric acid 85%	0.04	85.0	0.001
Potassium phosphate, monobasic	0.04	99.0	0.01
Sodium acetate trihydrate	0.02	99.0	0.005
Sodium bicarbonate	0.05	99.7	0.015

Ion-Pair Reagents

Item	UV Absobance (min., 200nm, 0.005M)	UV Transmittance (min., 200nm, 0.005M)	Assay (min. %)	PH value (10%, sol)
1-Dodecane Sulfonic acid Sodium salt	0.15	–	98.0	5.5 ~ 7.5
1-Heptane Sulfonic acid Sodium salt	–	70.0	99.0	5.5 ~ 7.5
1-Hexane Sulfonic acid Sodium salt	–	70.0	99.0	5.5 ~ 7.5
1-Octane Sulfonic acid Sodium salt	–	70.0	99.0	5.5 ~ 7.5
1-Pentane Sulfonic acid Sodium salt	–	70.0	99.0	5.5 ~ 7.5

Acetic acid, glacial

HPLC Grade

Formula : CH_3COOH F.W. : 60.05 CAS : 64-19-7 Product No. : 1755

Physical Data

Eluotropic value (E°) (on Silica)	〉0.73
Polarity Index (P')	6.2
Viscosity (cP, 25℃)	1.10
Density (g/mℓ, 25℃)	1.049
Boiling Point (℃)	117
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.370

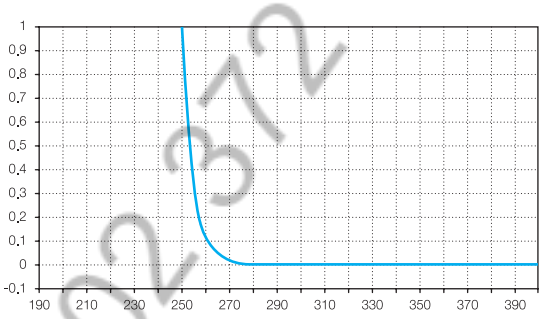

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
254 nm	1.00
256 nm	0.80
280 nm	0.05
350 nm	0.02
UV Cutoff	max. 254 nm
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.1%
Residue after Evaporation	5 ppm
Titrable base	0.0004 mEq/g
Dilution test	To pass test
Acetic anhydride	0.01 %
Chloride (Cl)	1 ppm
Sulfate (SO_4)	1 ppm
Heavy Metals (as Pb)	0.5 ppm
Iron (Fe)	0.2 ppm
Substances reducing dichromate	To pass test
Substances reducing permanganate	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Acetone

HPLC Grade

Formula : $(CH_3)_2CO$ F.W. : 58.08 CAS : 67-64-1 Product No. : 515

Physical Data

Eluotropic value (E°) (on Alumina)	0.56
Polarity Index (P')	5.1
Viscosity (cP, 25℃)	0.306
Density (g/㎖, 25℃)	0.785
Boiling Point (℃)	56
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.357

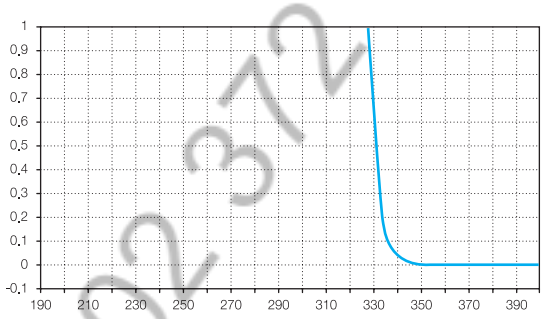

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
330 nm	1.00
340 nm	0.06
350 nm	0.01
UV Cutoff	max. 330 nm
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.25 %
Residue after Evaporation	1 ppm
Titrable acid	0.0003 mEq/g
Titrable base	0.0006 mEq/g
Solubility in water	To pass test
Substances reducing permanganate	To pass test
Aldehyde (as HCHO)	0.002 %
Methanol (as CH_3OH)	0.05 %
Isopropyl Alcohol (as $(CH_3)_2CHOH$)	0.05 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Acetonitrile

HPLC Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 549

Physical Data

Eluotropic value (E°) (on Alumina)	0.65
Polarity Index (P')	5.8
Viscosity (cP, 25℃)	0.369
Density (g/mℓ, 25℃)	0.779
Boiling Point (℃)	82
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.342

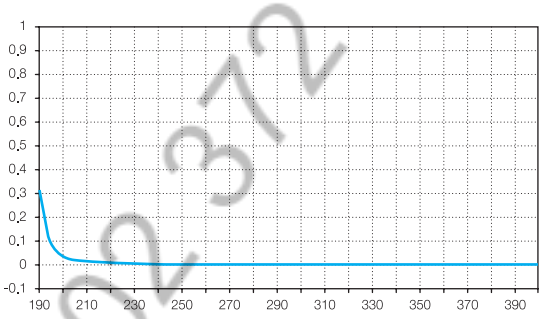

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

190 nm	1.00
195 nm	0.15
200 nm	0.05
205 nm	0.04
210 nm	0.02
220 nm	0.01
254 nm	0.009
UV Cutoff	max. 190 nm

LC Gradient Suitability

Gradient Elution test	To pass test
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	1 ppm
Titrable acid	0.008 mEq/g
Titrable base	0.0006 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Acetonitrile, isocratic

HPLC Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 4761

Physical Data

Eluotropic value (E_o) (on Alumina)	0.65
Polarity Index (P')	5.8
Viscosity (cP, 25℃)	0.369
Density (g/mℓ, 25℃)	0.779
Boiling Point (℃)	82
Percent water soluble in Solvent	Miscible
Refractive Index (25℃)	1.342

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

200nm	1.00
220nm	0.15
240nm	0.05
Identification	IR Spectrometry
Assay (by GC)	Min. 99.8 %
Water	0.03 %
Density (20℃)	0.779 ~ 0.783
Residue after Evaporation	5 ppm
Titrable acid	0.008 mEq/g
Titrable base	0.0006 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

2.5L x 4 Btl/Box
4L x 4 Btl/Box

Ammonium acetate

HPLC Grade

Formula : $CH_3CO_2NH_4$ F.W. : 77.08 CAS : 631-61-8 Product No. : 3033

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254nm	0.02
280nm	0.01
350nm	0.01
Assay	min. 97.0 %
pH of a 5% soluion (25℃)	6.7 ~ 7.3
Insoluble matter	0.005 %
Residue after ignition	0.01 %
Chloride (Cl)	5 ppm
Nitrate (NO_3)	0.001 %
Sulfate (SO_4)	0.001 %
Heavy metals (as Pb)	5 ppm
Iron (Fe)	5 ppm

For use in HPLC & ACS experiments

500g x 20Btl/Box
1kg x 10Btl/Box

Ammonium carbonate

HPLC Grade

Formula : $(NH_4)_2CO_3$ F.W. : 96.09 CAS : 506-87-6 Product No. : 3034

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254nm	0.02
280nm	0.01
350nm	0.01
Assay (as NH_3)	min. 30.0 %
Insoluble matter	0.005 %
Chloride (Cl)	5 ppm
Sulfur compounds (as SO_4)	0.002 %
Heavy metals (as Pb)	5 ppm
Iron (Fe)	5 ppm
Nonvolatile matter	0.01 %

For use in HPLC & ACS experiments

500g x 20Btl/Box
1kg x 10Btl/Box

Ammonium phosphate, monobasic

Acid & Buffers

HPLC Grade

Formula : $NH_4H_2PO_4$ F.W. : 115.03 CAS : 7722-76-1 Product No. : 3035

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254nm	0.03
280nm	0.02
350nm	0.01
Assay	min. 98.0 %
pH of a 5% soluion (25℃)	3.8 ~ 4.4
Insoluble matter	0.005 %
Chloride (Cl)	5 ppm
Nitrate (NO_3)	0.001 %
Sulfate (SO_4)	0.01 %
Heavy metals (as Pb)	5 ppm
Iron (Fe)	0.001 %
Potassium(K)	0.005 %
Sodium (Na)	0.005 %
Calcium (Ca)	0.001 %
Magnesium (Mg)	0.0005 %

For use in HPLC & ACS experiments

500g x 20Btl/Box
1kg x 10Btl/Box

Benzene

HPLC Grade

Formula : C_6H_6 F.W. : 78.10 CAS : 71-43-2 Product No. : 980

Physical Data

Eluotropic value (E°) (on Alumina)	0.32
Viscosity (cP, 25℃)	0.604
Density (g/㎖, 25℃)	0.872
Boiling Point (℃)	80
Solubility of water (%,25℃)	0.063
Refractive Index (25℃)	1.498

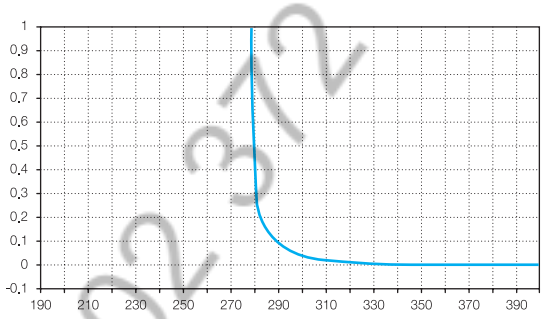

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
280 nm	1.00
290 nm	0.15
300 nm	0.05
330 nm	0.01
350 nm	0.005
UV Cutoff	max. 280 nm
Assay (by GC	min. 99.7 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	5 ppm
Substances darkened by sulfuric acid	To pass test
Thiophene (limit about 1 ppm)	To pass test
Sulfur compounds (as S)	0.005 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1-Butanol (n-Butyl Alcohol)

HPLC Grade

Formula : $CH_3(CH_2)_3OH$ F.W. : 74.12 CAS : 71-36-3 Product No. : 1047

Physical Data

Eluotropic value (E°) (on Alumina)	0.7
Polarity Index (P')	3.9
Viscosity (cP, 25℃)	2.544
Density (g/mℓ, 25℃)	0.806
Boiling Point (℃)	11 8
Solubility of water (%,20℃)	20.07
Refractive Index (25℃)	1.397

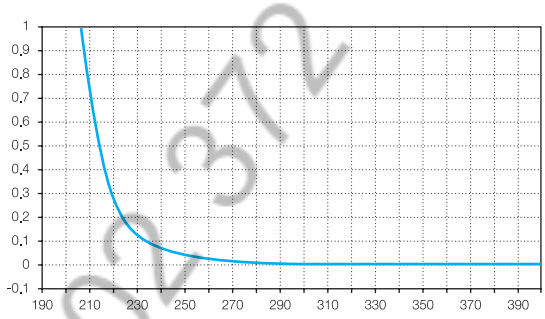

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
215 nm	1.00
220 nm	0.50
230 nm	0.20
254 nm	0.025
UV Cutoff	max. 215 nm
Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.1 %
Residue after Evaporation	5 ppm
Titrable acid	0.0008 mEq/g
Carbonyl compounds (as butyraldehyde)	0.01 %
Butyl ether	0.2 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

n-Butyl acetate

HPLC Grade

Formula : $CH_3CO_2(CH_2)_3CH_3$ F.W. : 116.16 CAS : 123-86-4 Product No. : 1038

Physical Data

Eluotropic value (E°) (on Alumina)	4.0
Viscosity (cP, 25℃)	0.685
Density (g/mℓ, 25℃)	0.876
Boiling Point (℃)	126
Solubility of water (%,20℃)	1.86
Refractive Index (25℃)	1.392

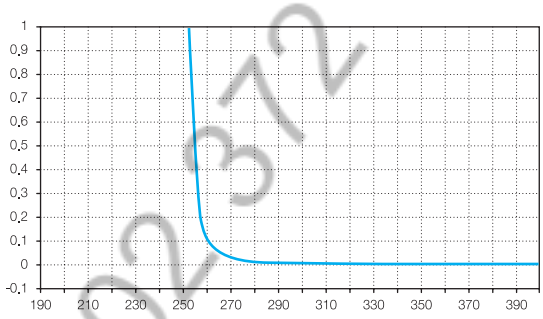

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

254 nm	1.00
260 nm	0.20
275 nm	0.04
300 nm	0.02
320 nm	0.01
UV Cutoff	max. 254 nm
Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	5 ppm
Titrable acid	0.0016 mEq/g
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Chlorobenzene

HPLC Grade

Formula : C_6H_5Cl F.W. : 112.56 CAS : 108-90-7 Product No. : 2229

Physical Data

Eluotropic value (E°) (on Alumina)	4.0
Polarity Index (P')	2.7
Density (g/mℓ, 25℃)	1.107
Boiling Point (℃)	132
Refractive Index (20℃)	1.525

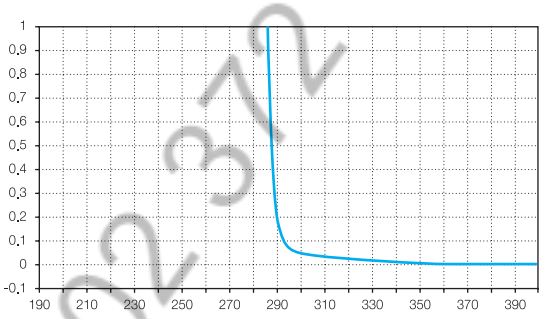

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

288 nm	1.00
300 nm	0.05
325 nm	0.04
350 nm	0.02
400 nm	0.01
UV Cutoff	max. 288 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	30
Water	0.03 %
Residue after Evaporation	5 ppm
Titrable acid	0.004 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Chloroform
(Stabilized with Amylene)

HPLC Grade

Formula : $CHCl_3$ F.W. : 119.38 CAS : 67-66-3 Product No. : 1781
Stabilized with 40~200 ppm Amylene

Physical Data

Eluotropic value (E°) (on Alumina)	0.40
Polarity Index (P')	4.1
Viscosity (cP, 25℃)	0.537
Density (g/㎖, 25℃)	1.480
Boiling Point (℃)	61
Solubility of water (%,20℃)	0.056
Refractive Index (25℃)	1.444

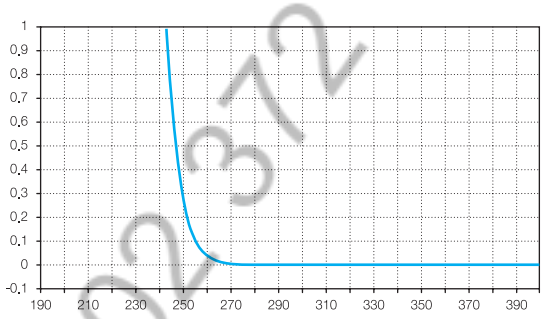

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

245 nm	1.00
250 nm	0.33
254 nm	0.15
270 nm	0.02
280 nm	0.01
UV Cutoff	max. 245 nm
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water (%)	0.02
Residue after Evaporation	2 ppm
Preservative (Amylene)	40 ~ 200 ppm
Lead (Pb)	0.05 ppm
Acid and Chloride	To pass test
Free Chlorine	To pass test
Suitability for use in Dithizone test	To pass test
Acetone and Aldehyde	0.005 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Chloroform
(Stabilized with Ethanol)

HPLC Grade

Formula : $CHCl_3$ F.W. : 119.38 CAS : 67-66-3 Product No. : 1271
Stabilized with 0.5~1.0% Ethanol

Physical Data

Eluotropic value (E°) (on Alumina)	0.40
Polarity Index (P')	4.1
Viscosity (cP, 25℃)	0.537
Density (g/mℓ, 25℃)	1.480
Boiling Point (℃)	61
Solubility of water (%,20℃)	0.056
Refractive Index (25℃)	1.444

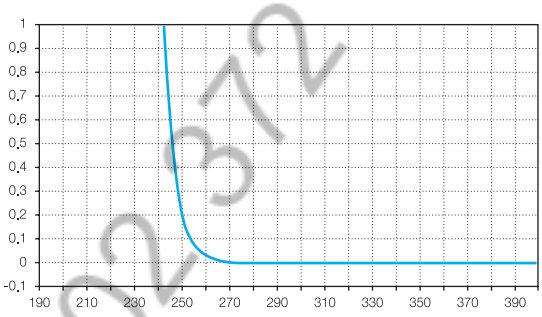

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

245 nm	1.00
250 nm	0.33
254 nm	0.15
270 nm	0.02
280 nm	0.01
UV Cutoff	max. 245 nm
Assay (by GC, Excluding preservative)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	2 ppm
Preservative (Ethanol)	0.5 ~ 1.0 %
Lead (Pb)	0.05 ppm
Acid and Chloride	To pass test
Free Chlorine	To pass test
Substances darkened by sulfuric acid	To pass test
Suitability for use in Dithizone test	To pass test
Acetone and Aldehyde	0.005%

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Cyclohexane

HPLC Grade

Formula : C_6H_{12} F.W. : 84.16 CAS :110-82-7 Product No. : 1331

Physical Data

Eluotropic value (E°) (on Alumina)	0.04
Polarity Index (P')	0.2
Viscosity (cP, 25℃)	0.894
Density (g/㎖, 25℃)	0.773
Boiling Point (℃)	81
Solubility of water (%,20℃)	0.01
Refractive Index (25℃)	1.424

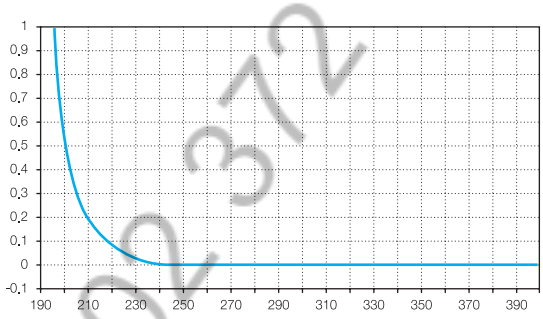

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

202 nm	1.00
205 nm	0.88
210 nm	0.67
254 nm	0.01
UV Cutoff	max. 202 nm
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	5 ppm
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

o-Dichlorobenzene

HPLC Grade

Formula : $C_6H_4Cl_2$ F.W. : 147.00 CAS : 95-50-1 Product No. : 1680

Physical Data

Viscosity (cP, 25℃)	1.32
Density (g/mℓ, 20℃)	1.3058
Boiling Point (℃)	180.5
Refractive Index (20℃)	1.5514

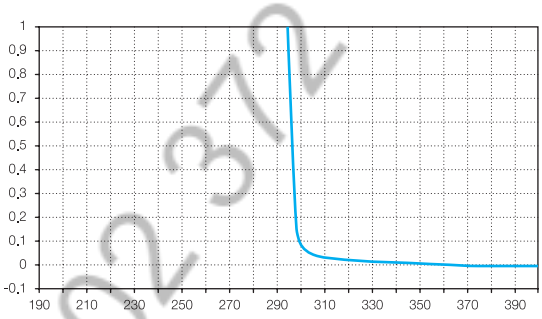

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

296 nm	1.00
300 nm	0.30
325 nm	0.10
350 nm	0.05
400 nm	0.01
UV Cutoff	max. 296 nm
Assay (by GC)	min. 98.0 %
Color (APHA)	30
Water	0.02 %
Residue after Evaporation	5 ppm
Acidity (as HCl)	0.005 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1,2-Dichloroethane

HPLC Grade

Formula : $ClCH_2CH_2Cl$ F.W. : 98.96 CAS :107-06-2 Product No. : 425

Physical Data

Eluotropic value (E°) (on Alumina)	0.44
Polarity Index (P')	3.5
Viscosity (cP, 25℃)	0.779
Density (g/㎖, 25℃)	1.245
Boiling Point (℃)	84
Solubility of water (%,20℃)	0.15
Refractive Index (25℃)	1.444

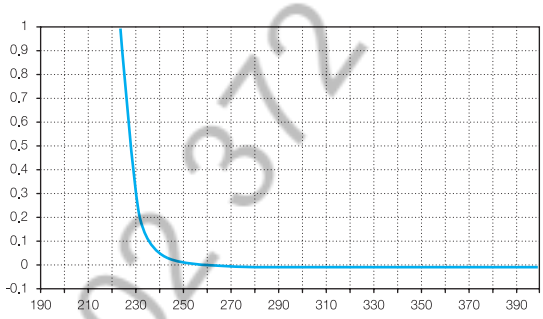

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

226 nm	1.00
230 nm	0.50
235 nm	0.20
240 nm	0.10
245 nm	0.05
250 nm	0.02
255 nm	0.01
400 nm	0.01
UV Cutoff	max. 226 nm
Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Titrable acid	0.0003 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Dichloromethane
(Stabilized with Amylene)

HPLC Grade

Formula : CH_2Cl_2 F.W. : 84.93 CAS : 75-09-2 Product No. : 577
Stabilized with 40~200ppm Amylene

Physical Data

Eluotropic value (E°) (on Alumina)	0.42
Polarity Index (P')	3.1
Viscosity (cP, 25℃)	0.413
Density (g/mℓ, 25℃)	1.318
Boiling Point (℃)	40
Solubility of water (%,20℃)	0.24
Refractive Index (25℃)	1.421

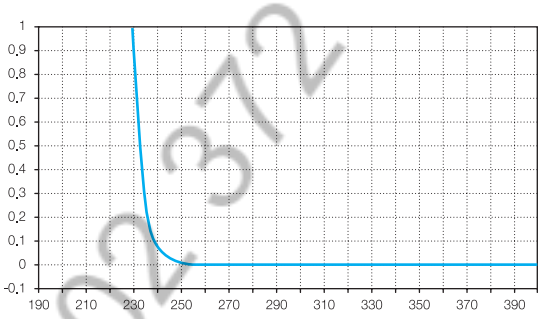

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

233 nm	1.00
235 nm	0.50
240 nm	0.15
254 nm	0.01
280 nm	0.01
UV Cutoff	max. 233 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	2 ppm
Preservative (Amylene)	40 ~ 200 ppm
Titrable acid	0.0003 mEq/g
Free Halogens	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

N,N–Dimethylacetamide

HPLC Grade

Formula : $CH_3CON(CH_3)_2$ F.W. : 87.12 CAS : 127–19–5 Product No. : 2964

Physical Data

Polarity Index (P')	6.5
Viscosity (cP, 20℃)	2.14
Density (g/mℓ, 25℃)	0.937
Boiling Point (℃)	165~166
Solubility of water (%,20℃)	Miscible
Refractive Index (20℃)	1.4384

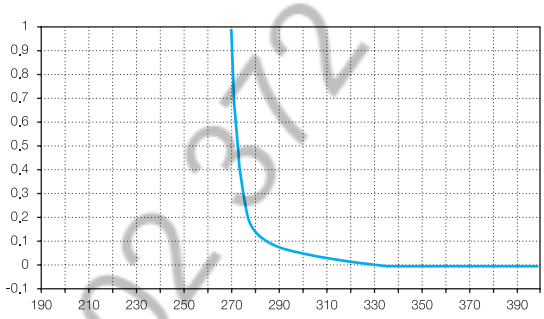

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

270nm	1.00
280nm	0.30
290nm	0.15
310nm	0.05
320nm	0.03
360nm	0.01
400nm	0.01
UV Cutoff	max. 270 nm
Assay (by GC)	min. 99.8 %
Water	0.03 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

N,N-Dimethylformamide

HPLC Grade

Formula : $HCON(CH_3)_2$ F.W. : 73.09 CAS : 68-12-2 Product No. : 1371

Physical Data

Eluotropic value (E°) (on C18)	7.6
Polarity Index (P')	6.4
Viscosity (cP, 25℃)	0.794
Density (g/mℓ, 25℃)	0.944
Boiling Point (℃)	153
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.427

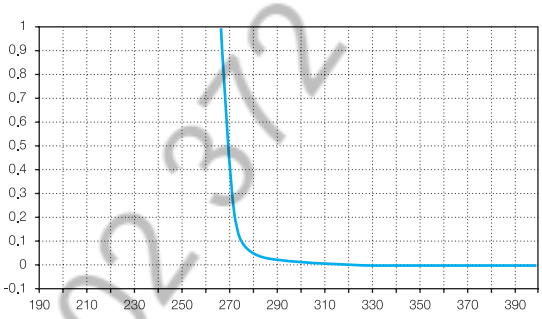

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
270 nm	1.00
275 nm	0.30
295 nm	0.10
310 nm	0.05
340 nm	0.01
UV Cutoff	max. 270 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	5 ppm
Titrable acid	0.0005 mEq/g
Titrable base	0.003 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Dimethyl Sulfoxide

HPLC Grade

Formula : $(CH_3)_2SO$ F.W. : 78.13 CAS : 67-68-5 Product No. : 2762

Physical Data

Eluotropic value (E°) (on Alumina)	0.62
Polarity Index (P')	7.2
Viscosity (cP, 25℃)	1.987
Density (g/㎖, 25℃)	1.096
Boiling Point (℃)	189
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.476

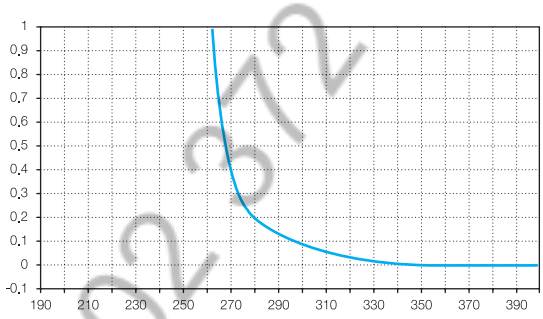

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

263 nm	1.00
270 nm	0.40
290 nm	0.18
310 nm	0.06
330 nm	0.02
350 nm	0.01
UV Cutoff	max. 263 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	5 ppm
Titrable acid	0.001 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1,4-Dioxane

HPLC Grade

Formula : $(CH_2)_4O_2$ F.W. : 88.11 CAS : 123-91-1 Product No. : 1356

Physical Data

Eluotropic value (E°) (on Alumina)	0.56
Polarity Index (P')	4.8
Viscosity (cP, 25℃)	1.177
Density (g/mℓ, 25℃)	1.028
Boiling Point (℃)	101.0
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.420

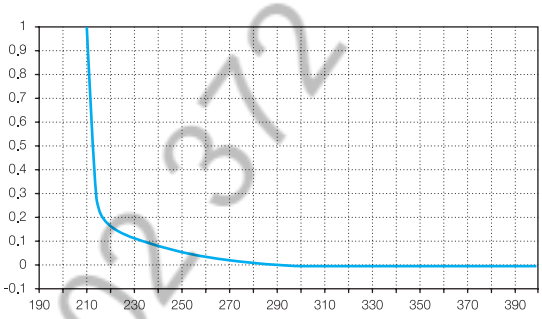

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
215 nm	1.00
225 nm	0.50
250 nm	0.24
270 nm	0.10
300 nm	0.01
UV Cutoff	max. 215 nm
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Titrable acid	0.0016 mEq/g
Peroxide (as H_2O_2, at time of packaging)	0.003 %
Carbonyl (as HCHO)	0.01 %
Freezing point	Not below 11.0 ℃

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1-Dodecane Sulfonic acid Sodium salt

Formula : $C_{12}H_{25}NaO_3S$ F.W. : 272.38 CAS : 2386-53-0

Specifications and Max. impurities

Ultraviolet Spectrophotometry

UV Absorbance (0.005M, Water)

200nm	Min. 0.15
220nm	Min. 0.05
Assay	Min. 98.0 %
pH value (10%, sol)	5.5 ~ 7.5
Loss on drying (at 120℃, vacuum)	Max. 2.0 %

For use in HPLC & ACS experiments

25g x 10 Btl/Box

Ethanol

HPLC Grade

Formula : C_2H_5OH F.W. : 46.07 CAS : 64-17-5 Product No. : 76

Physical Data

Eluotropic value (E°) (on Alumina)	0.88
Polarity Index (P')	4.3
Viscosity (cP, 25℃)	1.074
Density (g/mℓ, 25℃)	0.787
Boiling Point (℃)	78
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.359

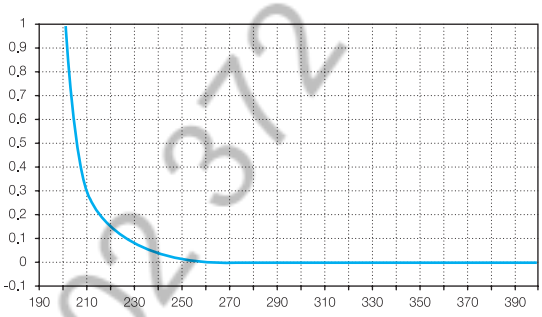

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm	1.00
210 nm	0.65
220 nm	0.35
254 nm	0.04
UV Cutoff	max. 205 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.1 %
Residue after Evaporation	5 ppm
Titrable acid	0.0003 mEq/g
Titrable base	0.0002 mEq/g
Acetone, isopropyl alcohol	To pass test
Methanol (CH_3OH)	0.1 %
Solubility in water	To pass test
Substances darkened by sulfuric acid	To pass test
Substances reducing permanganate	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Ethyl Acetate

HPLC Grade

Formula : $CH_3COOC_2H_5$ F.W. : 88.11 CAS : 141-78-6 Product No. : 3083

Physical Data

Eluotropic value (E°) (on Alumina)	0.58
Polarity Index (P')	4.4
Viscosity (cP, 25℃)	0.423
Density (g/㎖, 25℃)	0.894
Boiling Point (℃)	77
Solubility of water (%,20℃)	3.3
Refractive Index (25℃)	1.370

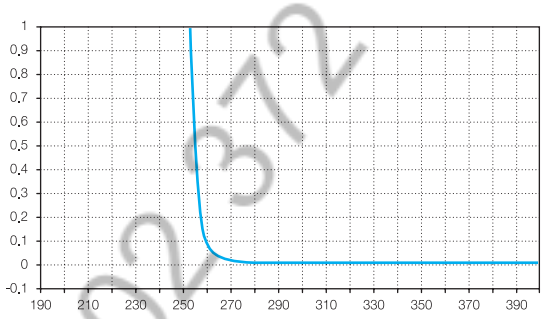

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
255 nm	1.00
260 nm	0.15
270 nm	0.025
UV Cutoff	max. 255 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Titrable acid	0.0009 mEq/g
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Ethyl Ether, Anhydrous
(Stabilized with Ethanol)

HPLC Grade

Formula : $C_2H_5OC_2H_5$ F.W. : 74.12 CAS : 60-29-7 Product No. : 558
Stabilized with about 1.5~2.5 % Ethanol

Physical Data

Eluotropic value (E°) (on Alumina)	0.38
Polarity Index (P')	2.8
Viscosity (cP, 25℃)	0.24
Density (g/㎖, 25℃)	0.708
Boiling Point (℃)	34
Solubility of water (%,20℃)	1.26
Refractive Index (25℃)	1.352

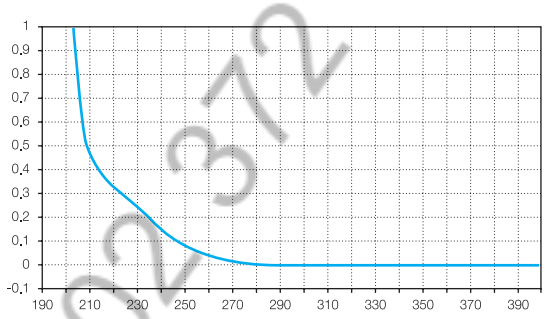

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
218 nm	1.00
254 nm	0.07
280 nm	0.02
350 nm	0.01
UV Cutoff	max. 218 nm
Assay (by GC, Excluding preservative)	min. 99.8 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	5 ppm
Titrable acid	0.0002 mEq/g
Preservative (C_2H_5OH)	1.5 ~ 2.5 %
Peroxide (as H_2O_2, at time of packaging)	max. 1 ppm
Carbonyl compounds (as HCHO)	0.001 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

n-Heptane 97%

HPLC Grade

Formula : $CH_3(CH_2)_5CH_3$ F.W. : 100.21 CAS : 142-82-5 Product No. : 2054

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 25℃)	0.40
Density (g/㎖, 25℃)	0.681
Boiling Point (℃)	98
Solubility of water (%,25℃)	0.01
Refractive Index (25℃)	1.385

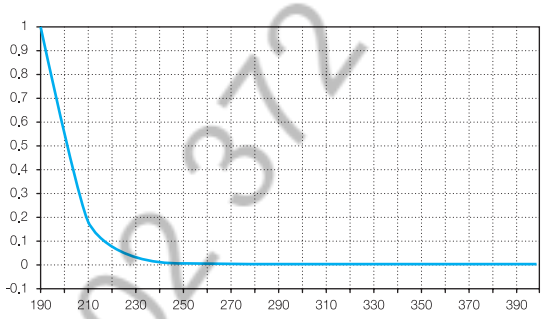

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm	1.00
200 nm	0.75
215 nm	0.20
254 nm	0.01
UV Cutoff	max. 197 nm
Assay (by GC, n-Heptane)	min. 97.0 %
(total C7 Hydrocarbons)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	3 ppm
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

n-Heptane 99%

HPLC Grade

Formula : $CH_3(CH_2)_5CH_3$ F.W. : 100.21 CAS : 142-82-5 Product No. : 2704

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 25℃)	0.40
Density (g/mℓ, 25℃)	0.681
Boiling Point (℃)	98
Solubility of water (%,25℃)	0.01
Refractive Index (25℃)	1.385

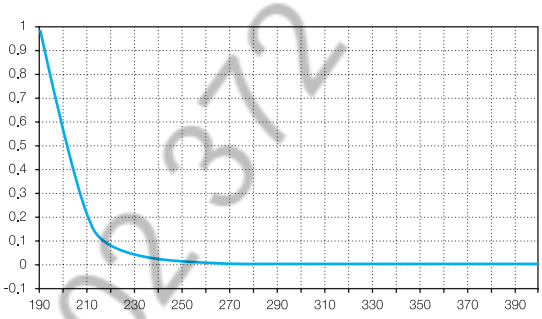

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
197 nm	1.00
200 nm	0.75
215 nm	0.20
254 nm	0.01
UV Cutoff	max. 197 nm
Assay (by GC, n-Heptane)	min. 99.0 %
(total C7 Hydrocarbons)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	3 ppm
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1–Heptane Sulfonic acid Sodium salt

Formula : $C_7H_{15}NaO_3S$ F.W. : 202.25 CAS : 22767–50–6

Specifications and Max. impurities

Ultraviolet Spectrophotometry

UV Absorbance (0.005M, Water)

200nm	Min. 70.0 %
220nm	Min. 90.0 %
250nm	Min. 98.0 %
Assay	Min. 99.0 %
pH value (10%, sol)	5.5 ~ 7.5
Loss on drying (at 120℃, vacuum)	Max. 2.0 %

For use in HPLC & ACS experiments

25g x 10 Btl/Box

n-Hexane 95%

HPLC Grade

Formula : $CH_3(CH_2)_4CH_3$ F.W. : 86.18 CAS : 110-54-3 Product No. : 820

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 25℃)	0.300
Density (g/mℓ, 25℃)	0.656
Boiling Point (℃)	69
Solubility of water (%,20℃)	0.01
Refractive Index (25℃)	1.372

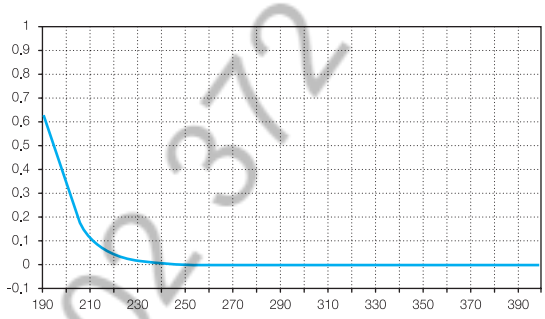

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
195 nm	1.00
210 nm	0.25
220 nm	0.075
254 nm	0.005
UV Cutoff	max. 195 nm
Assay (by GC, n-Hexane)	min. 95.0 %
(total C6 Hydrocarbons)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	3 ppm
Water soluble titrable acid	0.0003 mEq/g
Sulfur compounds (as S)	0.005 %
Thiophene	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1-Hexane Sulfonic acid Sodium salt

Formula : $C_6H_{13}NaO_3S$ F.W. : 188.22 CAS : 2832-45-3

Specifications and Max. impurities

Ultraviolet Spectrophotometry

UV Transmittance (0.005M, Water)

200nm	Min. 70.0 %
220nm	Min. 90.0 %
250nm	Min. 98.0 %
Assay	Min. 99.0 %
pH value (10%, sol)	5.5 ~ 7.5
Loss on drying (at 120℃, vacuum)	Max. 2.0 %

For use in HPLC & ACS experiments

25g x 10 Btl/Box

Isooctane
(2,2,4-Trimethylpentane)

HPLC Grade

Formula : $(CH_3)_2CHCH_2C(CH_3)_3$ F.W. : 114.23 CAS : 540-84-1 Product No. : 1186

Physical Data

Eluotropic value (E°) (on Alumina)	0.01
Polarity Index (P')	0.1
Viscosity (cP, 22℃)	0.51
Density (g/mℓ, 20℃)	0.691
Boiling Point (℃)	99
Solubility of water (%,20℃)	0.006
Refractive Index (25℃)	1.389

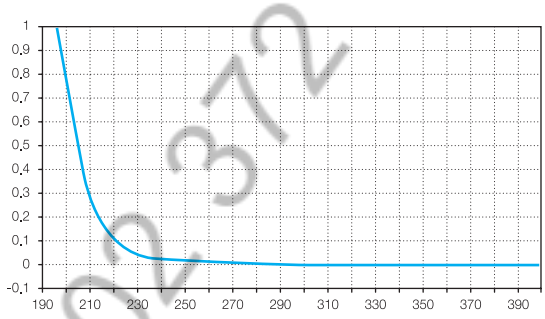

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm	1.00
225 nm	0.10
254 nm	0.014
UV Cutoff	max. 205 nm
Assay (by GC)	min. 99.0 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	4 ppm
Water soluble titrable acid	0.0003 mEq/g
Sulfur compounds (as S)	0.005 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Methanol

HPLC Grade

Formula : CH_3OH F.W. : 32.04 CAS : 67-56-1 Product No. : 62

Physical Data

Eluotropic value (E°) (on Alumina)	0.95
Polarity Index (P')	5.1
Viscosity (cP, 25℃)	0.544
Density (g/ml , 25℃)	0.787
Boiling Point (℃)	65
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.326

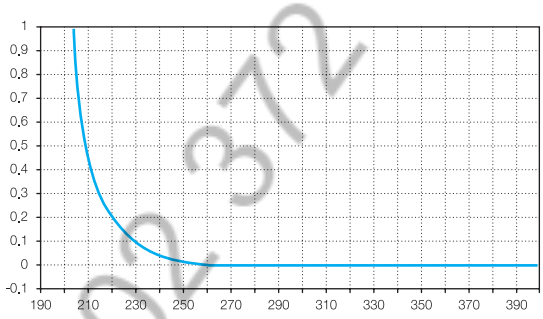

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm	1.00
220 nm	0.25
230 nm	0.15
254 nm	0.02
280 nm	0.01
UV Cutoff	max. 205 nm

LC Gradient Suitability

Gradient Elution test	To pass test
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	3 ppm
Titrable acid	0.0003 mEq/g
Titrable base	0.0002 mEq/g
Carbonyl compounds (each of Acetone, Formaldehyde and Acetaldehyde)	0.001 %
Substances darkened by sulfuric acid	To pass test
Substances reducing permanganate	To pass test
Solubility in water	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Methanol, isocratic

HPLC Grade

Formula : CH_3OH F.W. : 32.04 CAS : 67-56-1 Product No. : 4978

Physical Data

Eluotropic value (E_o) (on Alumina)	0.95
Polarity Index (P')	5.1
Viscosity (cP, 25℃)	0.544
Density (g/㎖, 25℃)	0.787
Boiling Point (℃)	65
Percent water soluble in Solvent	Miscible
Refractive Index (25℃)	1.326

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

212 nm	0.70
220 nm	0.30
243 nm	0.05
Identification	IR Spectrometry
Assay (by GC)	Min. 99.7 %
Water	0.05 %
Density (25℃)	0.790 ~ 0.792
Residue after Evaporation	5 ppm
Titrable acid	0.0003 mEq/g
Titrable base	0.0002 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

2.5L x 4 Btl/Box
4L x 4 Btl/Box

Methyl t-Butyl Ether

HPLC Grade

Formula : $(CH_3)_3COCH_3$ F.W. : 88.14 CAS : 1634-04-4 Product No. : 1070

Physical Data

Eluotropic value (E°) (on Alumina)	0.35
Polarity Index (P')	2.5
Viscosity (cP, 25℃)	0.28
Density (g/㎖, 20℃)	0.740
Boiling Point (℃)	55
Solubility of water (%,20℃)	1.5
Refractive Index (25℃)	1.366

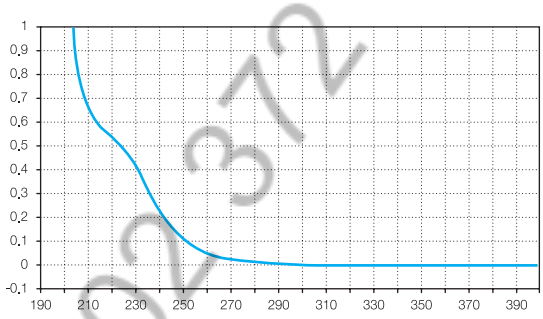

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

210 nm	1.00
225 nm	0.50
250 nm	0.10
300 nm	0.01
350 nm	0.01
UV Cutoff	max. 210 nm
Assay (by GC)	min. 99.0 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	5 ppm
Peroxide (as H_2O_2, at time of packaging)	1 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Methyl Ethyl Ketone

HPLC Grade

Formula : $C_2H_5OCH_3$ F.W. : 72.11 CAS : 78-93-3 Product No. : 610

Physical Data

Eluotropic value (E°) (on Alumina)	0.51
Polarity Index (P')	4.7
Viscosity (cP, 25℃)	0.38
Density (g/mℓ, 25℃)	0.799
Boiling Point (℃)	80
Solubility of water (%,20℃)	10.0
Refractive Index (25℃)	1.377

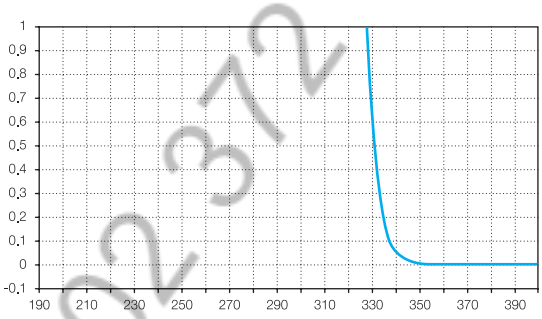

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

329 nm	1.00
335 nm	0.30
340 nm	0.08
350 nm	0.01
400 nm	0.01
UV Cutoff	max. 329 nm
Assay (by GC)	min. 99.6 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	3 ppm
Titrable acid	0.0005 mEq/g
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Methyl Isobutyl Ketone

HPLC Grade

Formula : $(CH_3)_2CHCH_2COCH_3$ F.W. : 100.16 CAS : 108-10-1 Product No. : 634

Physical Data

Eluotropic value (E°) (on Alumina)	0.43
Polarity Index (P')	4.2
Viscosity (cP, 25℃)	0.58
Density (g/㎖, 20℃)	0.801
Boiling Point (℃)	117~118
Refractive Index (20℃)	1.3957

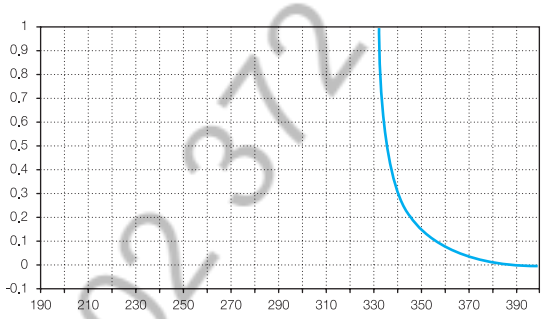

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
334 nm	1.00
340 nm	0.50
350 nm	0.25
360 nm	0.15
400 nm	0.01
UV Cutoff	max. 334 nm
Assay (by GC)	min. 99.0 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	5 ppm
Titrable acid	0.002 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

N-Methyl-2-Pyrrolidone

HPLC Grade

Formula : C_5H_9NO F.W. : 99.13 CAS : 872-50-4 Product No. : 674

Physical Data

Polarity Index (P')	6.7
Viscosity (cP, 25℃)	1.65
Density (g/mℓ, 25℃)	1.025
Boiling Point (℃)	202
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.469

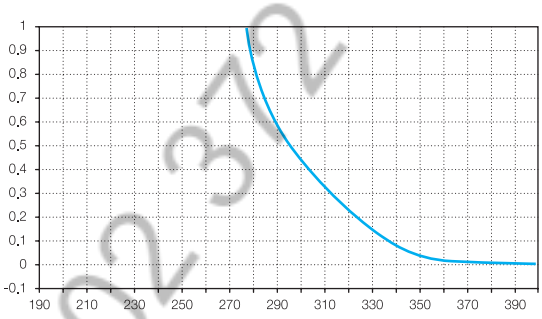

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

285 nm	1.00
300 nm	0.50
325 nm	0.10
350 nm	0.03
400 nm	0.01
UV Cutoff	max. 285 nm
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	10 ppm
Free Amines (as CH_3NH_2)	0.01 %
Chloride (Cl)	1 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1-Octane Sulfonic acid Sodium salt

HPLC Grade

Formula : $C_8H_{17}NaO_3S$ F.W. : 216.28 CAS : 5324-84-5 Product No. : 4592

Specifications and Max. impurities

Ultraviolet Spectrophotometry

UV Absorbance (0.005M, Water)

200nm	Min. 70.0 %
220nm	Min. 90.0 %
250nm	Min. 98.0 %
Assay	Min. 99.0 %
pH value (10%, sol)	5.5 ~ 7.5
Loss on drying (at 120℃, vacuum)	Max. 2.0 %

For use in HPLC & ACS experiments

25g x 10 Btl/Box

n-Pentane

HPLC Grade

Formula : $CH_3(CH_2)_3CH_3$ F.W. : 72.15 CAS :109-66-0 Product No. : 1575

Physical Data

Eluotropic value (E°) (on Alumina)	0.00
Polarity Index (P')	0.00
Viscosity (cP, 25℃)	0.22
Density (g/mℓ, 25℃)	0.621
Boiling Point (℃)	36
Solubility of water (%,20℃)	0.009
Refractive Index (25℃)	1.355

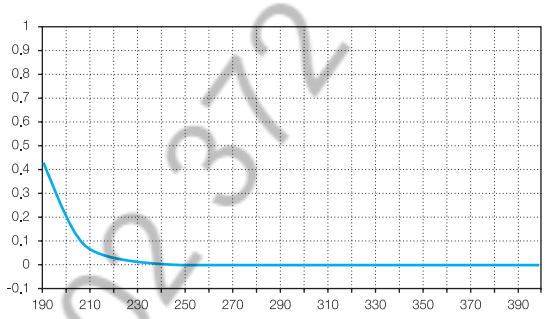

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
190 nm	1.00
200 nm	0.30
210 nm	0.10
254 nm	0.01
UV Cutoff	max. 190 nm
Assay (by GC, n-Pentane)	min. 98.0 %
(total C5 Hydrocarbons)	min. 99.9%
Color (APHA)	5
Water	0.02 %
Residue after Evaporation	5 ppm
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1–Pentane Sulfonic acid Sodium salt

Ion–Pair Reagents

HPLC Grade

Formula : $C_5H_{11}NaO_3S$ F.W. : 174.20 CAS : 22767–49–3

Specifications and Max. impurities

Ultraviolet Spectrophotometry

UV Absorbance (0.005M, Water)

200nm	Min. 70.0 %
220nm	Min. 90.0 %
250nm	Min. 98.0 %
Assay	Min. 99.0 %
pH value (10%, sol)	5.5 ~ 7.5
Loss on drying (at 120℃, vacuum)	Max. 2.0 %

For use in HPLC & ACS experiments

25g x 10 Btl/Box

Petroleum Ether (35~60℃)

HPLC Grade

CAS : 8032-32-4 Product No. : 1591

Physical Data

Polarity Index (P')	0.1
Density (g/㎖, 20℃)	0.64
Boiling Point (℃)	35 ~ 60
Refractive Index (20℃)	1.365

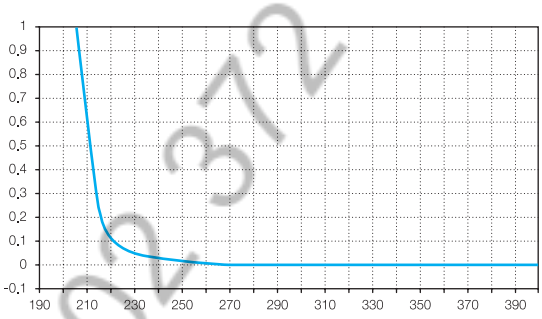

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

220 nm	1.00
230 nm	0.20
250 nm	0.05
270 nm	0.01
400 nm	0.01
UV Cutoff	max. 220 nm
Boiling range (Initial to dry point)	35 ~ 60℃
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	0.001 %
Acidity	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Phosphoric acid 85%

HPLC Grade

Formula : H_3PO_4 F.W. : 98.00 CAS : 7664–38–2 Product No. : 3036

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

220nm	0.05
254nm	0.04
300nm	0.02
Assay	min. 85.0 %
Color (APHA)	10
Insoluble matter	0.001%
Chloride (Cl)	3 ppm
Nitrate (NO_3)	5 ppm
Sulfate (SO_4)	0.003 %
Volatile acids (as CH_3COOH)	0.001 %
Antimony (Sb)	0.002 %
Calcium	0.002 %
Magnesium	0.002 %
Potassium(K)	0.005 %
Sodium (Na)	0.025 %
Arsenic (As)	1 ppm
Heavy metals (as Pb)	0.001 %
Iron (Fe)	0.003 %
Manganese(Mn)	0.5 ppm
Reducing substances	To pass test

For use in HPLC & ACS experiments

500g x 20Btl/Box
1kg x 10Btl/Box

Potassium phosphate, monobasic

Acid & Buffers

HPLC Grade

Formula : KH_2PO_4 F.W. : 136.09 CAS : 7778-77-0 Product No. : 1755

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254nm	0.04
Assay	min. 99.0 %
pH of a 5% solution (25℃)	4.1 ~ 4.5
Insoluble matter	0.01 %
Loss on drying (at 105 ℃)	0.2 %
Chloride (Cl)	0.001 %
Nitirgen compounds (as N)	0.001 %
Sulfate (SO_4)	0.003 %
Heavy metals (as Pb)	0.001 %
Iron (Fe)	0.002 %
Sodium (Na)	0.005 %

For use in HPLC & ACS experiments

500g x 20Btl/Box
1kg x 10Btl/Box

1-Propanol (n-Propyl Alcohol)

HPLC Grade

Formula : $CH_3CH_2CH_2OH$ F.W. : 60.10 CAS : 71-23-8 Product No. : 623

Physical Data

Eluotropic value (E°) (on Alumina)	0.82
Polarity Index (P')	4.0
Viscosity (cP, 25℃)	1.95
Density (g/㎖, 25℃)	0.802
Boiling Point (℃)	97
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.383

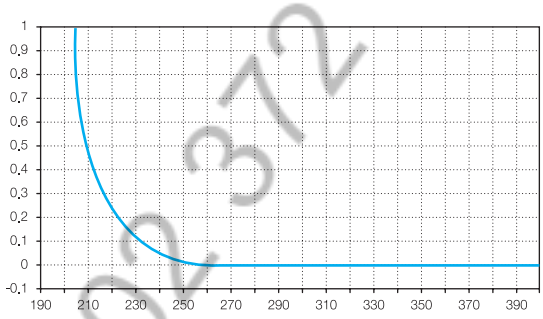

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
210 nm	1.00
225 nm	0.50
250 nm	0.05
300 nm	0.01
UV Cutoff	max. 210 nm
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	3 ppm
Titrable acid	0.0003 mEq/g
Carbonyl compounds (as C_2H_5CHO)	0.03 %
Ethanol (CH_3CH_2OH)	0.01 %
Methanol (CH_3OH)	0.01 %
Isopropyl Alcohol ($CH_3CHOHCH_3$)	0.05 %
Solubility in water	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

2-Propanol (Isopropyl Alcohol)

HPLC Grade

Formula : $(CH_3)_2CHOH$ F.W. : 60.10 CAS : 67-63-0 Product No. : 859

Physical Data

Eluotropic value (E°) (on Alumina)	0.82
Polarity Index (P')	3.9
Viscosity (cP, 25℃)	2.038
Density (g/mℓ, 25℃)	0.782
Boiling Point (℃)	82
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.375

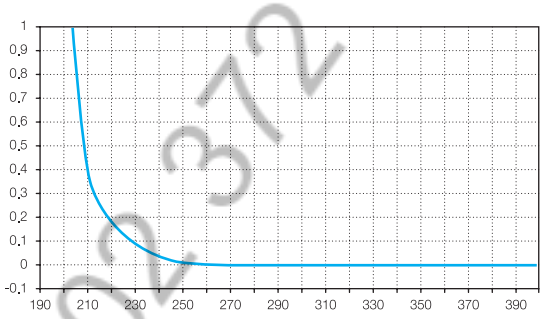

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm	1.00
220 nm	0.25
230 nm	0.13
254 nm	0.02
UV Cutoff	max. 205 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.05 %
Residue after Evaporation	2 ppm
Titrable acid or Base	0.0001 mEq/g
Carbonyl Compounds (as propionaldehyde or acetone)	0.002 %
Solubility in water	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Pyridine

HPLC Grade

Formula : C_5H_5N F.W. : 79.10 CAS : 110-86-1 Product No. : 877

Physical Data

Eluotropic value (E°) (on Alumina)	0.71
Polarity Index (P')	5.3
Viscosity (cP, 25℃)	0.88
Density (g/mℓ, 25℃)	0.978
Boiling Point (℃)	115
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.507

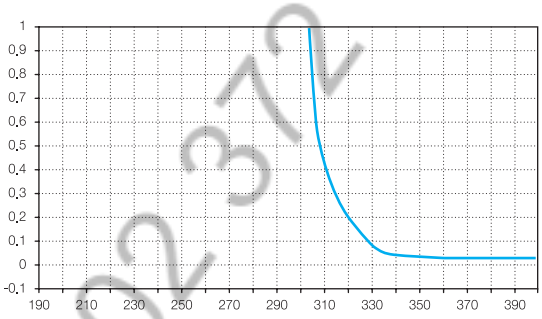

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
330 nm	1.00
340 nm	0.10
350 nm	0.01
400 nm	0.005
UV Cutoff	max. 330 nm
Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Ammonia (as NH_3)	0.002 %
Chloride (Cl)	0.0005 %
Sulfate (SO_4)	0.001 %
Copper (Cu)	5 ppm
Solubility in water	To pass test
Reducing Substances	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Sodium acetate trihydrate

HPLC Grade

Formula : $CH_3COONa \cdot 3H_2O$ F.W. : 136.08 CAS : 6131–90–4 Product No. : 3039

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254nm	0.02
Assay	99.0 ~ 101.0 %
pH of a 5% soluion (25℃)	7.5 ~ 9.2
Substances reducing permanganate	To pass test
Insoluble matter	0.005 %
Chloride (Cl)	0.001 %
Phosphate(PO_4)	5 ppm
Sulfate (SO_4)	0.002 %
Heavy metals (as Pb)	5 ppm
Iron (Fe)	5 ppm
Calcium (Ca)	0.005 %
Magnesium (Mg)	0.002 %
Potassium (K)	0.005 %

For use in HPLC & ACS experiments

500g x 20Btl/Box
1kg x 10Btl/Box

Sodium bicarbonate

HPLC Grade

Formula : $NaHCO_3$ F.W. : 84.01 CAS : 144–55–8 Product No. : 3038

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance (1M Solution)

254nm	0.05
280nm	0.02
350nm	0.01
Assay (dried basis)	99.7 ~ 100.3 %
Insoluble mater	0.015 %
Chloride (Cl)	0.003 %
Phosphate(PO_4)	0.001 %
Sulfur compounds (as SO_4)	0.003 %
Ammonium (NH_4)	5 ppm
Heavy metals (as Pb)	5 ppm
Iron (Fe)	0.001%
Calcium (Ca)	0.02 %
Magnesium (Mg)	0.005%
Potassium (K)	0.005%

For use in HPLC & ACS experiments

500g x 20Btl/Box
1kg x 10Btl/Box

Tetrahydrofuran

HPLC Grade

Formula : C_4H_8O F.W. : 72.11 CAS : 109-99-9 Product No. : 218
No Stabilizer

Physical Data

Eluotropic value (E°) (on Alumina)	0.45
Polarity Index (P')	4.0
Viscosity (cP, 25℃)	0.456
Density (g/mℓ, 25℃)	0.880
Boiling Point (℃)	65
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.404

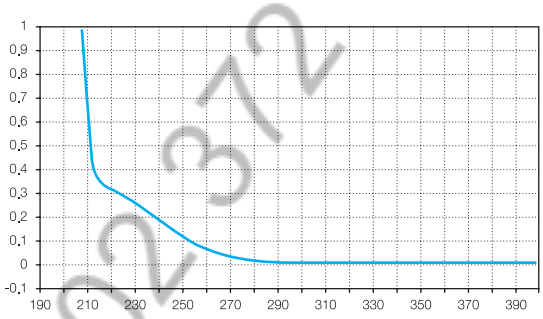

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
210 nm	1.00
215 nm	0.60
230 nm	0.30
254 nm	0.10
UV Cutoff	max. 210 nm
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Peroxides (as H_2O_2, at time of packaging)	0.015 %

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Tetrahydrofuran
(Stabilized with BHT)

HPLC Grade

Formula : C_4H_8O F.W. : 72.11 CAS : 109-99-9 Product No. : 219
Stabilized with 200~300 ppm BHT

Physical Data

Eluotropic value (E°) (on Alumina)	0.45
Polarity Index (P')	4.0
Viscosity (cP, 25℃)	0.456
Density (g/㎖, 25℃)	0.880
Boiling Point (℃)	65
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.404

Specifications and Max. impurities

Meets ACS Specification

Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.02 %
Peroxides (as H_2O_2, at time of packaging)	0.015 %
Stabilizer (BHT)	200 ~ 300 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in GPC experiments

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Toluene

HPLC Grade

Formula : $C_6H_5CH_3$ F.W. : 92.14 CAS : 108-88-3 Product No. : 187

Physical Data

Eluotropic value (E°) (on Alumina)	0.29
Polarity Index (P')	2.4
Viscosity (cP, 25℃)	0.560
Density (g/mℓ, 25℃)	0.864
Boiling Point (℃)	111
Solubility of water (%,25℃)	0.033
Refractive Index (25℃)	1.494

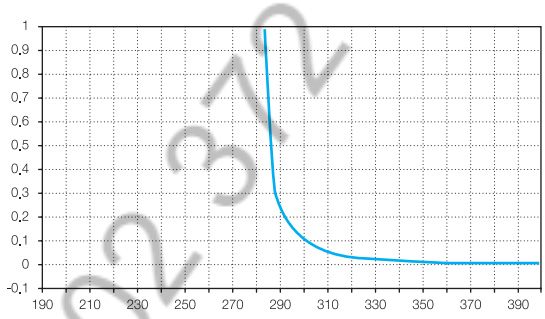

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
286 nm	1.00
288 nm	0.40
300 nm	0.10
350 nm	0.01
UV Cutoff	max. 286 nm
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.02 %
Residue after Evaporation	5 ppm
Sulfur Compounds (as S)	0.003 %
Substances darkened by sulfuric acid	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC, GC, ACS experiments & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

1,2,4–Trichlorobenzene

HPLC Grade

Formula : $C_6H_3Cl_3$ F.W. : 181.46 CAS : 120–82–1 Product No. : 4579

Physical Data

Density (g/mℓ, 25℃)	1.454
Boiling Point (℃)	213.5
Solubility of water (%,20℃)	0.03
Refractive Index (20℃)	1.571

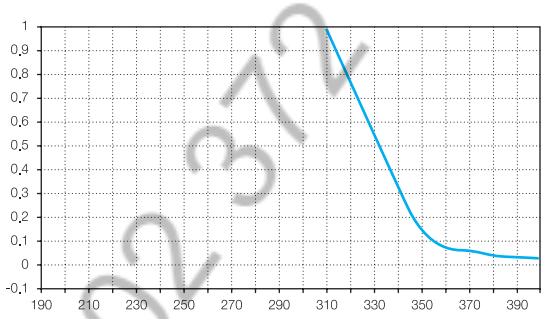

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
310nm	1.00
350nm	0.15
375nm	0.05
400nm	0.01
UV Cutoff	max. 310 nm
Assay (by GC)	min. 99.0 %
Water	0.01 %
Residue after Evaporation	5 ppm
Density (20℃)	1.452 ~ 1.458
Refractive Index (20℃)	1.569 ~ 1.574

Packaged under Nitrogen and sub-micron filtered.
For use in GPC, ACS experiments

3.8 L x 4 Btl/Box

Water

HPLC Grade

Formula : H_2O F.W. : 18.01 CAS : 7732-18-5 Product No. : 119

Physical Data

Eluotropic value (E°) (on Alumina)	0.99
Polarity Index (P')	10.2
Viscosity (cP, 25℃)	0.89
Density (g/mℓ, 20℃)	0.998
Boiling Point (℃)	100
Refractive Index (25℃)	1.333
Surface tension (20℃ dyne/cm)	72.7

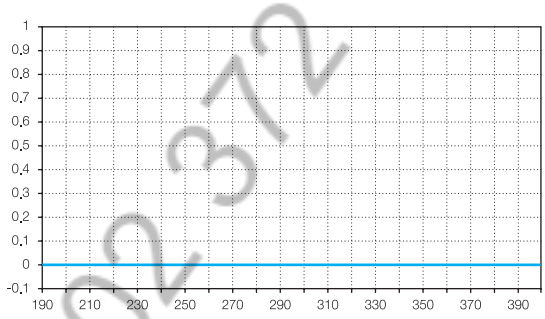

Specifications and Max. impurities

Meets ACS Specification

Ultraviolet Spectrophotometry

Maximum UV Absorbance

190 nm	0.01
200 nm	0.01
250 ~ 400 nm	0.005
UV Cutoff	max. 190 nm

LC Gradient Suitability

Gradient Elution test	To pass test
Color (APHA)	5
Residue after Evaporation (at time of packaging)	10 ppm
Conductance (μS/cm)	2

Packaged under Nitrogen and sub-micron filtered.
For use in HPLC & Spectrophotometry

1L x 10Btl/Box
2.5L x 4 Btl/Box
4L x 4 Btl/Box

Solvent name Synonyms
LC-MS
Ultimate
Pesticide
HPLC
Bio
Ultra Dry

DSP Bio

Item	UV Cutoff (max. nm)	Water (max. ppm)	Other
Acetonitrile	〈190	10	
Dichloromethane w/Amylene	233	30	Chloride 〈10 ppm Acidity 〈 0.0003 mEq/g
N,N-Dimethylformamide	270	300	Amines 〈 5 ppm
Dimethyl Sulfoxide	263	250	
Methanol	205	300	Acetone 〈0.001 %
N-Methyl-2-Pyrrolidone	285	200	Amines 〈 5 ppm
Pyridine	330	100	Amines 〈 10 ppm
Tetrahydrofuran	210	50	
Triethyl Amine	-	0.1%	

Acetonitrile

BIO Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 3362

Physical Data

Eluotropic value (E°) (on Alumina)	0.65
Polarity Index (P')	5.8
Viscosity (cP, 25℃)	0.369
Density (g/㎖, 25℃)	0.779
Boiling Point (℃)	82
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.342

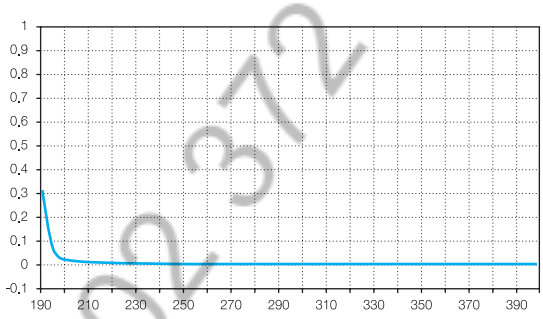

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

190 nm	1.00
195 nm	0.15
200 nm	0.07
205 nm	0.05
210 nm	0.04
220 nm	0.02
254 nm	0.01
UV Cutoff	max. 190 nm

LC Gradient Suitability

Gradient Elution test	To pass test
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	10 ppm
Residue after Evaporation	1 ppm
Titrable acid	0.008 mEq/g
Titrable base	0.0006 mEq/g

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Dichloromethane
(Stabilized with Amylene)

BIO Grade

Formula : CH_2Cl_2 F.W. : 84.93 CAS : 75-09-2 Product No. : 597
Stabilized with 40~200ppm Amylene

Physical Data

Eluotropic value (E°) (on Alumina)	0.42
Polarity Index (P')	3.1
Viscosity (cP, 25℃)	0.413
Density (g/㎖, 25℃)	1.318
Boiling Point (℃)	40
Solubility of water (%,20℃)	0.24
Refractive Index (25℃)	1.421

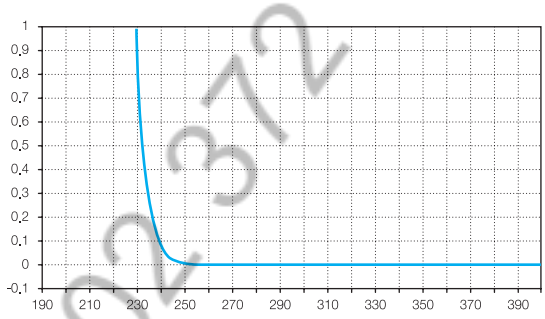

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

233 nm	1.00
240 nm	0.12
254 nm	0.01
UV Cutoff	max. 233 nm
Chloride (Cl)	**10 ppm**
Titrable acid	**0.0003 mEq/g**
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	30 ppm
Residue after Evaporation	3 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

N,N-Dimethylformamide

BIO Grade

Formula : $HCON(CH_3)_2$ F.W. : 73.09 CAS : 68-12-2 Product No. : 1373

Physical Data

Eluotropic value (E°) (on Alumina)	7.6
Polarity Index (P')	6.4
Viscosity (cP, 25℃)	0.794
Density (g/㎖, 25℃)	0.944
Boiling Point (℃)	153
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.427

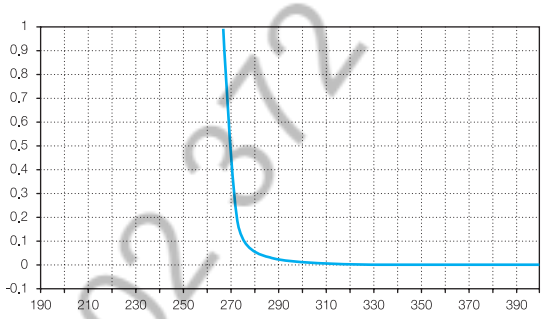

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

270 nm	1.00
275 nm	0.30
295 nm	0.10
310 nm	0.05
340 nm	0.01
UV Cutoff	max. 270 nm
Amines (as Dimethylamine)	**5 ppm**
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Dimethyl Sulfoxide

BIO Grade

Formula : $(CH_3)_2SO$ F.W. : 78.13 CAS : 67-68-5 Product No. : 1381

Physical Data

Eluotropic value (E°) (on Alumina)	0.62
Polarity Index (P')	7.2
Viscosity (cP, 25℃)	1.987
Density (g/mℓ, 25℃)	1.096
Boiling Point (℃)	189
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.476

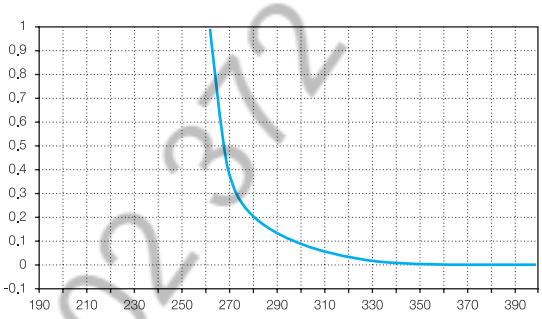

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

263 nm	1.00
270 nm	0.40
275 nm	0.20
280 nm	0.15
335 nm	0.02
400 nm	0.01
UV Cutoff	max. 263 nm
Assay (by GC)	min. 99.7 %
Color (APHA)	10
Water	0.025 %
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Methanol

BIO Grade

Formula : CH_3OH F.W. : 32.04 CAS : 67-56-1 Product No. : 2722

Physical Data

Eluotropic value (E°) (on Alumina)	0.95
Polarity Index (P')	5.1
Viscosity (cP, 25℃)	0.544
Density (g/mℓ, 25℃)	0.787
Boiling Point (℃)	65
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.326

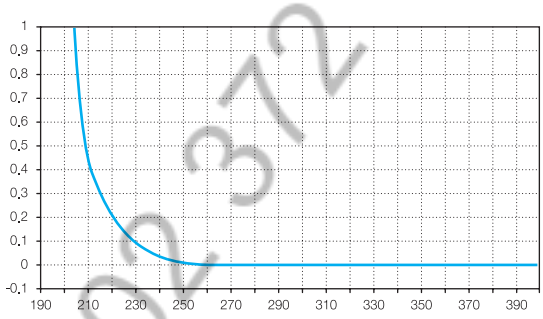

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
205 nm	1.00
220 nm	0.25
230 nm	0.15
254 nm	0.02
280 nm	0.01
UV Cutoff	max. 205 nm
Acetone	**To pass test (about 0.001 %)**
Assay (by GC)	min. 99.9 %
Color (APHA)	10
Water	0.03 %
Residue after Evaporation	3 ppm
Titrable acid	0.0003 mEq/g
Titrable base	0.0002 mEq/g
Substances reducing permanganate	To pass test
Solubility in water	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

N-Methyl-2-Pyrrolidone

BIO Grade

Formula : C_5H_9NO F.W. : 99.13 CAS : 872-50-4 Product No. : 2220

Physical Data

Polarity Index (P')	6.7
Viscosity (cP, 25℃)	1.65
Density (g/㎖, 25℃)	1.025
Boiling Point (℃)	202
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.469

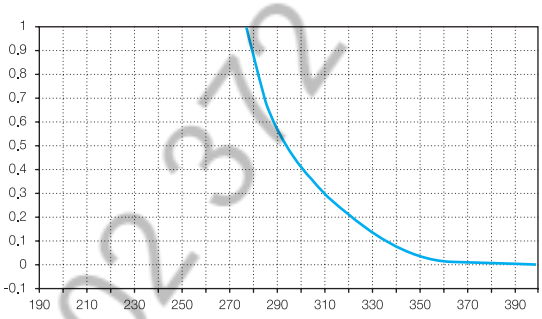

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

285 nm	1.00
300 nm	0.50
325 nm	0.10
350 nm	0.03
400 nm	0.01
UV Cutoff	max. 285 nm
Amines (as Dimethylamine)	**5 ppm**
Assay (by GC)	min. 99.5 %
Color (APHA)	20
Water	200 ppm
Residue after Ignition	10 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Pyridine

BIO Grade

Formula : C_5H_5N F.W. : 79.10 CAS : 110-86-1 Product No. : 2396

Physical Data

Eluotropic value (E°) (on Alumina)	0.71
Polarity Index (P')	5.3
Viscosity (cP, 25℃)	0.88
Density (g/㎖, 25℃)	0.978
Boiling Point (℃)	115
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.507

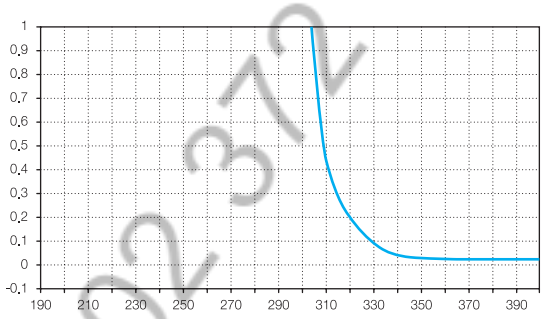

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance	
330 nm	1.00
340 nm	0.10
350 nm	0.01
400 nm	0.005
UV Cutoff	max. 330 nm
Amines (by Ninhydrin test)	**10 ppm**
Assay (by GC)	min. 99.0 %
Color (APHA)	10
Water	0.01 %
Residue after Evaporation	5 ppm
Chloride (Cl)	0.001 %
Sulfate (SO_4)	0.001 %
Copper (Cu)	5 ppm
Solubility in water	To pass test
Reducing Substances	To pass test

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Tetrahydrofuran

BIO Grade

Formula : C_4H_8O F.W. : 72.11 CAS : 109-99-9 Product No. : 221
No Stabilizer

Physical Data

Eluotropic value (E°) (on Alumina)	0.45
Polarity Index (P')	4.0
Viscosity (cP, 25℃)	0.456
Density (g/mℓ, 25℃)	0.880
Boiling Point (℃)	65
Solubility of water (%,20℃)	Miscible
Refractive Index (25℃)	1.404

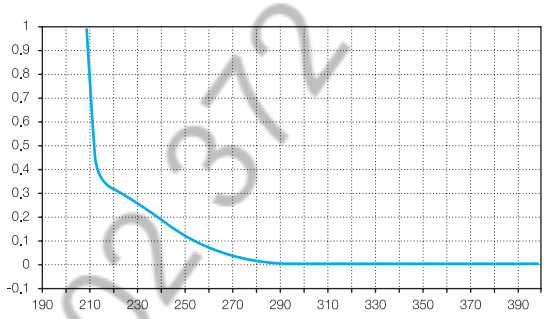

Specifications and Max. impurities

Ultraviolet Spectrophotometry

Maximum UV Absorbance

210 nm	1.00
215 nm	0.60
230 nm	0.30
254 nm	0.10
UV Cutoff	max. 210 nm
Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	5 ppm
Peroxides (as H_2O_2, at the time of packing)	0.015 %

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Triethylamine

BIO Grade

Formula : $(C_2H_5)_3N$ F.W. : 101.19 CAS : 121-44-8 Product No. : 2766

Physical Data

Density (g/㎖, 20℃)	0.73
Boiling Point (℃)	88.8
Refractive Index (20℃)	1.4

Specifications and Max. impurities

Assay (by GC)	min. 99.5 %
Color (APHA)	10
Water	0.1 %

Packaged under Nitrogen and sub-micron filtered.
For use in Bio synthesis and HPLC mobile phase modification

1L x 10Btl/Box
4L x 4 Btl/Box

Solvent name Synonyms
LC-MS
Ultimate
Pesticide
HPLC
Bio
Ultra Dry

DSP Ultra Dry

Item	Water (max. ppm)	Assay (min. %)	Residue aft. Evaporation (max. ppm)
Acetonitrile(water10)	10	99.8	5
Acetonitrile(water30)	30	99.8	5
Chloroform w/Ethanol	50	99.8	3
1,4-Dioxane	30	99.8	3
Ethyl Acetate	50	99.8	5
Ethyl Ether w/Ethanol	50	99.8	5
n-Hexane 95%	20	95.0	5
Methanol	50	99.8	3
Pyridine	50	99.8	5
Toluene	50	99.8	5

Acetonitrile (Water 10)

Ultra Dry Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 556

Specifications and Max. impurities

Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	10 ppm
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Acetonitrile (Water 30)

Ultra Dry Grade

Formula : CH_3CN F.W. : 41.05 CAS : 75-05-8 Product No. : 559

Specifications and Max. impurities

Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	30 ppm
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Chloroform
(Stabilized with Ethanol)

Ultra Dry Grade

Formula : $CHCl_3$ F.W. : 119.38 CAS : 67-66-3 Product No. : 1274
Stabilized with about 0.5~1.0% Ethanol

Specifications and Max. impurities

Assay (by GC, Excluding preservative)	min. 99.8 %
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	3 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

1,4-Dioxane

Ultra Dry Grade

Formula : $(CH_2)_4O_2$ F.W. : 88.11 CAS : 123-91-1 Product No. : 1358

Specifications and Max. impurities

Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	30 ppm
Residue after Evaporation	3 ppm
Peroxides (as H_2O_2, at time of packaging)	0.003 %

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Ethyl Acetate

Ultra Dry Grade

Formula : $CH_3COOC_2H_5$ F.W. : 88.11 CAS : 141-78-6 Product No. : 1406

Specifications and Max. impurities

Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Ethyl Ether, Anhydrous
(Stabilized with Ethanol)

Ultra Dry Grade

Formula : $C_2H_5OC_2H_5$ F.W. : 74.12 CAS : 60-29-7 Product No. : 570
Stabilized with about 1.5~2.5 % Ethanol

Specifications and Max. impurities

Assay (by GC, Excluding preservative)	min. 99.8 %
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	5 ppm
Peroxide (as H_2O_2, at the time of packing)	max. 5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

n-Hexane 95%

Ultra Dry Grade

Formula : $CH_3(CH_2)_4CH_3$ F.W. : 86.18 CAS : 110-54-3 Product No. : 823

Specifications and Max. impurities

Assay (by GC, n-Hexane)	min. 95.0 %
(total C6 Hydrocarbons)	min. 99.5 %
Color (APHA)	10
Water	20 ppm
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Methanol

Ultra Dry Grade

Formula : CH_3OH F.W. : 32.04 CAS : 67-56-1 Product No. : 66

Specifications and Max. impurities

Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	3 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Pyridine

Ultra Dry Grade

Formula : C_5H_5N F.W. : 79.10 CAS : 110-86-1 Product No. : 878

Specifications and Max. impurities

Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Toluene

Ultra Dry Grade

Formula : $C_6H_5CH_3$ F.W. : 92.14 CAS : 108-88-3 Product No. : 186

Specifications and Max. impurities

Assay (by GC)	min. 99.8 %
Color (APHA)	10
Water	50 ppm
Residue after Evaporation	5 ppm

Packaged under Nitrogen and sub-micron filtered.
For use in requiring low water applications

1L x 10Btl/Box
4L x 4 Btl/Box

Supplementary reference Information

Physical properties

Eluotropic Strength of Solvents on Various Sorbents

Solvent	ε° (Alumina)	ε° (SiO_2)	ε° (C_{18})
n-Pentane	0.00 [1)]	0.00 [1)]	-
n-Hexane	0.00 - 0.01	0.00 - 0.01	-
Isooctane	0.01	0.01	-
Cyclohexane	0.04	0.03	-
Toluene	0.20 - 0.30	0.22	-
Chlorobenzene	0.30 - 0.31	0.23	-
Benzene	0.32	0.25	-
Ethyl ether	0.38	0.38 - 0.43	-
Dichloromethane	0.36 - 0.42	0.30 - 0.42	-
Chloroform	0.36 - 0.40	0.26	-
1,2-Dichloroethane	0.44-0.49	-	-
Methyl ethyl ketone	0.51	-	-
Acetone	0.56-0.58	0.47 - 0.53	8.8
1,4-Dioxane	0.56 - 0.61	0.49 - 0.51	11.7
Tetrahydrofuran	0.45 - 0.62	0.53	3.7
Methyl t-butyl ether	0.3 - 0.62	0.48	-
Ethyl acetate	0.58-0.62	0.38 - 0.48	-
Dimethyl sulfoxide	0.62 - 0.75	-	-
Acetonitrile	0.52 - 0.65	0.50 - 0.52	3.1
1-Butanol	0.70	-	-
Pyridine	0.71	-	-
1-Propanol	0.78 - 0.82	-	10.1
2-Propanol	0.78 - 0.82	0.60	8.3
Ethanol	0.88	-	3.1
Methanol	0.95	0.70 - 0.73	1.0 [1)]
Dimethylformamide	-	-	7.6

1) Defined value

Physical properties
Polarity Index(P°)

Solvent	P°
n-Pentane	0.0
n-Heptane	0.1
n-Hexane	0.1
Isooctane	0.1
Petroleum Ether	0.1
Cyclohexane	0.2
Toluene	2.4
Methyl t-Butyl Ether	2.5
Chlorobenzene	2.7
Ethyl Ether	2.8
Dichloromethane	3.1
1,2-Dichloroethane	3.5
1-Butanol	3.9
2-Propanol	3.9
n-Butyl acetate	4.0
1-Propanol	4.0
Tetrahydrofuran	4.0
Chloroform	4.1
Methyl Isobutyl Ketone	4.2
Ethyl Acetate	4.4
Methyl Ethyl Ketone	4.7
1,4-Dioxane	4.8
Acetone	5.1
Methanol	5.1
Pyridine	5.3
Acetonitrile	5.8
Acetic acid	6.2
N,N-Dimethylformamide	6.4
N,N-Dimethylacetamide	6.5

Solvent	P°
N-Methyl-2-Pyrrolidone	6.7
Dimethyl Sulfoxide	7.2
Water	10.2

Physical properties
Viscosity(cP)

Solvent	cP (25℃)
n-Pentane	0.22
Ethyl ether	0.24
Methyl t-butyl ether	0.28
n-Hexane	0.3
Acetone	0.306
Acetonitrile	0.369
Methyl ethyl ketone	0.38
n-Heptane	0.4
Dichloromethane	0.413
Ethyl acetate	0.423
Tetrahydrofuran	0.456
Isooctane	0.51[1)]
Chloroform	0.537
Methanol	0.544
Toluene	0.56
Methyl Isobutyl ketone	0.58
Benzene	0.604
n-Butyl acetate	0.685
1,2-Dichloroethane	0.779
Dimethylformamide	0.794
Pyridine	0.88
Water	0.89
Cyclohexane	0.894
Ethanol	1.074
Acetic acid	1.10
1,4-Dioxane	1.177
o-Dichlorobenzene	1.32
N-Methyl-2-Pyrrolidone	1.65
1-Propanol	1.95

Solvent	cP (25℃)
N,N-Dimethylacetamide	1.956
Dimethyl sulfoxide	1.987
2-Propanol	2.038
1-Butanol	2.544

1) measured at 22℃

Physical properties
Density

Solvent	Density (g/ml, 25℃)
n-Pentane	0.621
n-Heptane	0.681
Petroleum Ether (35~60℃)	0.64[1)]
n-Hexane	0.656
Isooctane	0.691[1)]
Ethyl Ether	0.708
Triethylamine	0.73[1)]
Methyl t-Butyl Ether	0.740[1)]
Cyclohexane	0.773
Acetonitrile	0.779
2-Propanol	0.782
Acetone	0.785
Methanol	0.787
Ethanol	0.787
Methyl Ethyl Ketone	0.799
Methyl Isobutyl Ketone	0.801[1)]
1-Propanol	0.802
1-Butanol	0.806
Toluene	0.864
Benzene	0.872
n-Butyl acetate	0.876
Tetrahydrofuran	0.880
Ethyl Acetate	0.894
N,N-Dimethylacetamide	0.937
N,N-Dimethylformamide	0.944
Pyridine	0.978
Water	0.998[1)]
N-Methyl-2-Pyrrolidone	1.025
1,4-Dioxane	1.028

Solvent	Density (g/ml, 25℃)
Acetic acid,glacial	1.049
Dimethyl Sulfoxide	1.096
Chlorobenzene	1.107
1,2-Dichloroethane	1.245
o-Dichlorobenzene	1.3058[1)]
Dichloromethane	1.318
1,2,4–Trichlorobenzene	1.454
Chloroform	1.480

1) measured at 20℃

Physical properties
Solubility of water in solvent

Solvent	Solubility(%, 20℃)
1,2,4-Trichlorobenzene	0.0025
Isooctane	0.006
n-Pentane	0.009
Cyclohexane	0.01
n-Heptane	0.01[1)]
n-Hexane	0.01
Toluene	0.033[1)]
Chloroform	0.056
Benzene	0.063[1)]
1,2-Dichloroethane	0.15
Dichloromethane	0.24
Ethyl Ether	1.26
Methyl t-Butyl Ether	1.5
n-Butyl acetate	1.86
Ethyl Acetate	3.3
Methyl Ethyl Ketone	10
1-Butanol	20.07
Acetic acid,glacial	Miscible[2)]
Acetone	Miscible
Acetonitrile	Miscible
N,N-Dimethylacetamide	Miscible
N,N-Dimethylformamide	Miscible
Dimethyl Sulfoxide	Miscible
1,4-Dioxane	Miscible
Ethanol	Miscible
Methanol	Miscible
N-Methyl-2-Pyrrolidone	Miscible

Solvent	Solubility(%, 20℃)
1-Propanol	Miscible
2-Propanol	Miscible
Pyridine	Miscible
Tetrahydrofuran	Miscible

1) measured at 25℃

2) Miscible : two components can be mixed together in all proportions without forming two separate phases

Physical properties
Refractive Index

Solvent	Refractive Index (25℃)
Methanol	1.326
Water	1.333[1)]
Acetonitrile	1.342
Ethyl Ether	1.352
n-Pentane	1.355
Acetone	1.357
Ethanol	1.359
Petroleum Ether (35~60℃)	1.365
Methyl t-Butyl Ether	1.366
Acetic acid,glacial	1.370[1)]
Ethyl Acetate	1.370
n-Hexane	1.372
2-Propanol	1.375
Methyl Ethyl Ketone	1.377
1-Propanol	1.383
n-Heptane	1.385
Isooctane	1.389
n-Butyl acetate	1.392
Methyl Isobutyl Ketone	1.3957[1)]
1-Butanol	1.397
Tetrahydrofuran	1.404
1,4-Dioxane	1.420
Dichloromethane	1.421
Cyclohexane	1.424
N,N-Dimethylformamide	1.427
N,N-Dimethylacetamide	1.4384[1)]
Chloroform	1.444
1,2-Dichloroethane	1.444
1,2,4-Trichlorobenzene	1.454

Solvent	Refractive Index (25℃)
N-Methyl-2-Pyrrolidone	1.469
Dimethyl Sulfoxide	1.476
Toluene	1.494
Benzene	1.498
Pyridine	1.507
Chlorobenzene	1.525[1)]
o-Dichlorobenzene	1.5514[1)]

1) measured at 20℃

Physical properties
Boiling point

Solvent	Boiling point (℃)
Ethyl Ether	34
n-Pentane	36
Dichloromethane	40
Methyl t-Butyl Ether	55
Acetone	56
Petroleum Ether (35~60℃)	35~60
Chloroform	61
Methanol	65
Tetrahydrofuran	65
n-Hexane	69
Ethyl Acetate	77
Ethanol	78
Benzene	80
Methyl Ethyl Ketone	80
Cyclohexane	81
Acetonitrile	82
2-Propanol	82
1,2-Dichloroethane	84
1-Propanol	97
n-Heptane	98
Isooctane	99
Water	100
1,4-Dioxane	101
Toluene	111
Pyridine	115
Acetic acid,glacial	117
Methyl Isobutyl Ketone	117~118
1-Butanol	118
n-Butyl acetate	126
Chlorobenzene	132

Solvent	Boiling point (℃)
N,N-Dimethylformamide	153
N,N-Dimethylacetamide	165~166
o-Dichlorobenzene	180.5
Dimethyl Sulfoxide	189
N-Methyl-2-Pyrrolidone	202
1,2,4–Trichlorobenzene	213.5

Physical properties
Freezing point

Solvent	Freezing point(℃)
n-Pentane	-129.7
1-Propanol	-126.2
Ethyl Ether	-117.4
Ethanol	-114.1
Methyl t-Butyl Ether	-108.6
Tetrahydrofuran	-108.5
Isooctane	-107.4
Methanol	-97.7
n-Hexane	-95.3
Dichloromethane	-95.1
Toluene	-95.0
Acetone	-94.7
n-Heptane	-90.6
1-Butanol	-88.6
2-Propanol	-88.0
Methyl Ethyl Ketone	-86.7
Methyl Isobutyl Ketone	-84
Ethyl Acetate	-84.0
n-Butyl acetate	-73.5
Chloroform	-63.5
N,N-Dimethylformamide	-60.4
Chlorobenzene	-45.6
Acetonitrile	-43.8
Pyridine	-41.5
N-Methyl-2-Pyrrolidone	-24.4
N,N-Dimethylacetamide	-20

Solvent	Freezing point(℃)
o-Dichlorobenzene	-17.0
Water	0
Cyclohexane	6.5
1,4-Dioxane	11.8
Acetic Acid, glacial	16~17
1,2,4-Trichlorobenzene	16.9
Dimethyl Sulfoxide	18.5

Physical properties
UV Cutoff

Solvent	UV Cutoff (nm)
Acetonitrile	〈190
n-Pentane	190
Water	190
n-Hexane	195
n-Heptane	197
Cyclohexane	202
Ethanol	205
Isooctane	205
Methanol	205
2-Propanol	205
Methyl t-Butyl Ether	210
Petroleum Ether	210
1-Propanol	210
Tetrahydrofuran	210
1-Butanol	215
1,4-Dioxane	215
Ethyl Ether	218
1,2-Dichloroethane	226
Dichloromethane	233
Chloroform	245
Acetic acid,glacial	254
n-Butyl acetate	254
Ethyl Acetate	255
Dimethyl Sulfoxide	263
N,N-Dimethylacetamide	270
N,N-Dimethylformamide	270
Benzene	280
N-Methyl-2-Pyrrolidone	285
Toluene	286
Chlorobenzene	288

Solvent	UV Cutoff (nm)
o-Dichlorobenzene	296
1,2,4–Trichlorobenzene	310
Methyl Ethyl Ketone	329
Acetone	330
Pyridine	330
Methyl Isobutyl Ketone	334

Solvent Miscibility chart

Miscible
Immiscible

Miscible : two components can be mixed together in all proportions without forming two separate phases

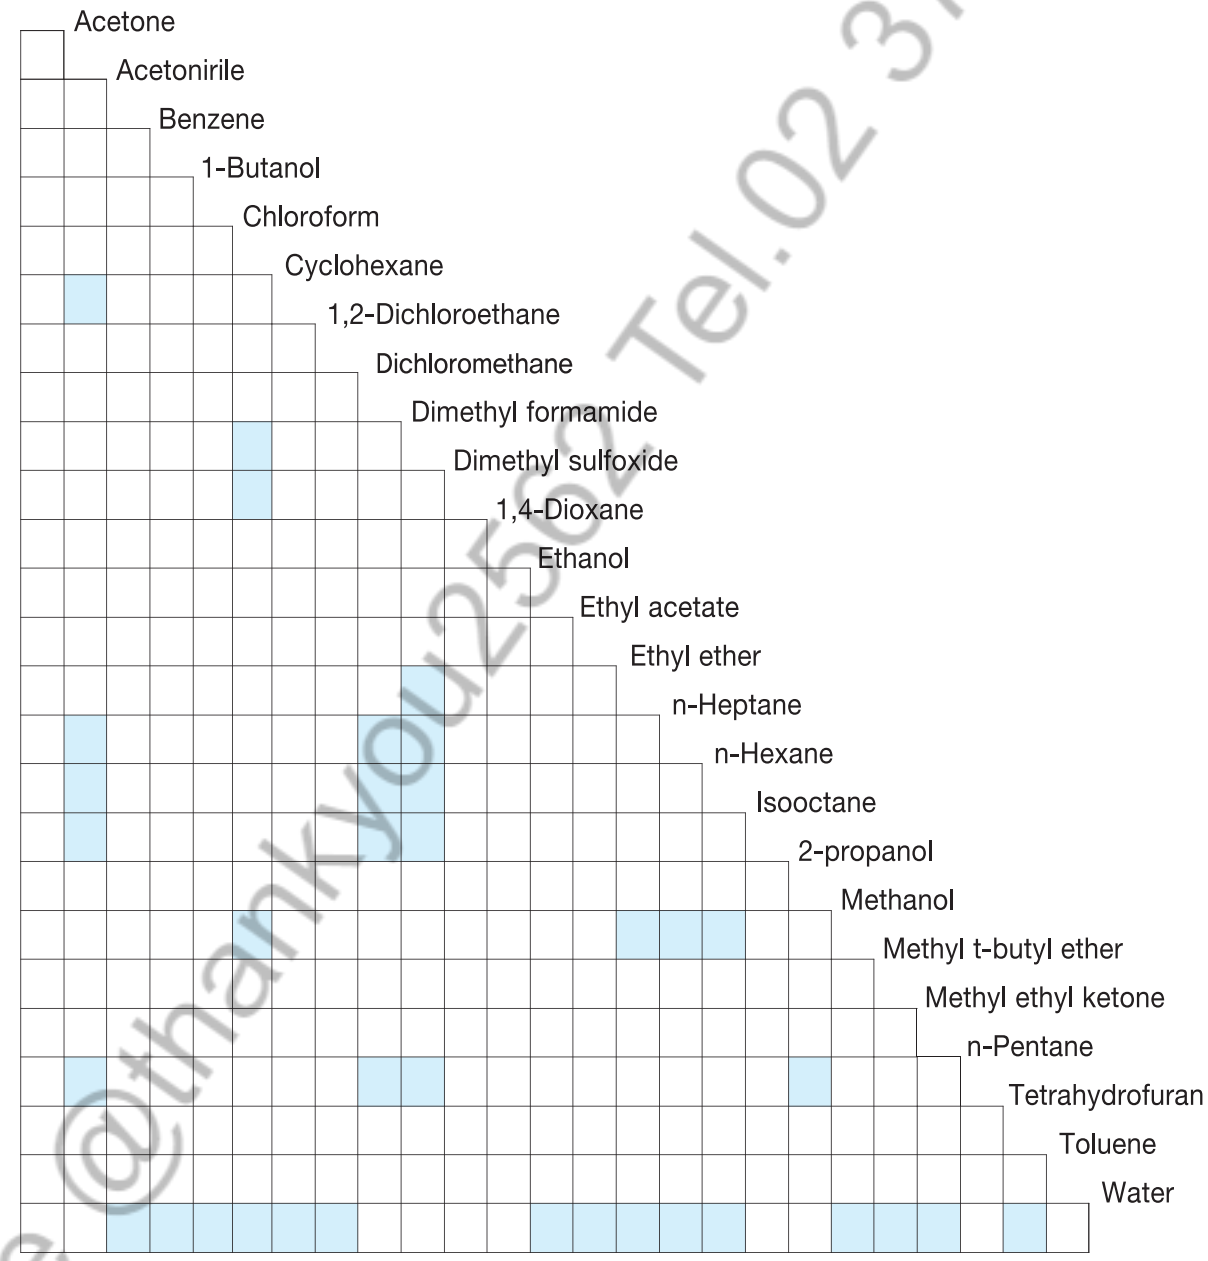

Transport Information[1)]

Solvent	Class[2)]	Subsidiary risk[2)]	Packing group	UN No.	Flash point[3)] (℃)
Acetic acid	8	3	II	UN 2789	40
Acetone	3	-	II	UN 1090	-20 ~ -18
Acetonitrile	3	-	II	UN 1648	2
Benzene	3	-	II	UN 1114	-11
1-Butanol	3	-	III	UN 1120	37
n-Butyl Acetate	3	-	II	UN 1123	27
Chlorobenzene	3	-	III	UN 1134	29
Chloroform	6.1	-	III	UN 1888	non-flammable
Cyclohexane	3	-	II	UN 1145	-18
o-Dichlorobenzene	6.1	-	III	UN 1591	66
1,2-Dichloroethane	3	6.1	II	UN 1184	13
Dichloromethane	6.1	-	III	UN 1593	-
N,N-Dimethylacetamide	6.1	-	III	UN 2810	70
N,N-Dimethylformamide	3	-	III	UN 2265	58
Dimethyl Sulfoxide	Not regulated	Not regulated	Not regulated	Not regulated	89
1,4-Dioxane	3	-	II	UN 1165	12
Ethanol	3	-	II	UN 1170	13
Ethyl Acetate	3	-	II	UN 1173	-4
Ethyl Ether	3	-	I	UN 1155	-40
n-Heptane	3	-	II	UN 1206	-4
n-Hexane	3	-	II	UN 1208	-22
Isooctane	3	-	II	UN 1262	-12
Methanol	3	6.1	II	UN 1230	12
Methyl Ethyl Ketone	3	-	II	UN 1193	-1
Methyl Isobutyl Ketone	3	-	II	UN 1245	14
Methyl t-butyl ether	3	-	II	UN 2398	below -18
N-Methyl-2-Pyrolidone	Not regulated	Not regulated	Not regulated	Not regulated	96[4)]
n-Pentane	3	-	I	UN 1265	below -40
Petroleum Ether(35~60℃)	3	-	I	UN 1268	-49
1-Propanol	3	-	III	UN 1274	23
2-Propanol	3	-	II	UN 1219	12
Pyridine	3	-	II	UN 1282	17
Tetrahydrofuran	3	-	II	UN 2056	below -18
Toluene	3	-	II	UN 1294	7
1,2,4-Trichlorobenzene	6.1	-	III	UN 2321	105
Triethylamine	3	8	II	UN 1296	-11

1) Reference : International Maritime Dangerous Goods Code, Volume 2, 2006
2) Class & Subsidiary risk
3. Flammable liquids
6.1 Toxic substances
8. Corrosive substances

3) Measured by closed cup method
4) Measured by open cup method

Units Conversion Tables

Units of Measure Conversion Factors

Percent	Parts per Million	Parts per Billion	Parts per Trillion
.001%=	10 ppm	-	-
.0001%=	1 ppm=	1,000 ppb=	1,000,000 ppt
.00001%=	.1 ppm=	100 ppb=	100,000 ppt
.000001%=	.01 ppm=	10 ppb=	10,000 ppt
-	.001 ppm=	1 ppb=	1,000 ppt
-	.0001 ppm=	.1 ppb=	100 ppt
-	-	.01 ppb=	10 ppt
-	-	.001 ppb=	1 ppt

Perfix	Factor	Fraction
centi	10^{-2}	1/100 (part per hundred)
milli	10^{-3}	1/1,000 (part per thousand)
micro	10^{-6}	1/1,000,000 (ppm, part per million)
nano	10^{-9}	1/1,000,000,000 (ppb, part per billion)
pico	10^{-12}	1/1,000,000,000,000 (ppt, part per trillion)
femto	10^{-15}	1/1,000,000,000,000,000 (ppq, part per quadrillion)
atto	10^{-18}	1/1,000,000,000,000,000,000 (part per quintillion)

Temperature Conversion Formulas

℃ to ℉	℉ to ℃
(℃×9/5)+32=℉	(℉−32)×5/9=℃

Weight Conversion Table[1]

From/To	g	kg	metiric ton	grain	oz	lb
g	1	0.001	1×10^{-6}	15.43	0.03527	0.00220
kg	1000	1	0.001	1.54×10^{4}	35.27	2.205
metric ton	1×10^{6}	1000	1	1.54×10^{7}	3.53×10^{4}	2205
grain	6.48×10^{-2}	6.48×10^{-5}	6.48×10^{-3}	1	2.29×10^{-3}	1.43×10^{-4}
oz	28.35	0.02835	2.83×10^{-5}	437.5	1	0.06250
lb	453.6	0.4536	4.54×10^{4}	7000	16	1

1.To convert from a unit shown in the left column, multiply by the factor listed in the column for the desired unit.

Volume Conversion Table[1] (metric and U.S.liquid measures)

From/To	cm^3	liter	m^3	in^3	ft^3	yd^3	fl oz	fl pt	fl qt	gal
cm^3	1	0.001	1×10^{-6}	0.06102	3.53×10^{-5}	1.31×10^{-6}	0.03381	0.00211	0.00106	2.64×10^{-4}
liter	1000	1	0.001	61.02	0.03532	0.00131	33.81	2.113	1.057	0.2642
m^3	1×10^{6}	1000	1	6.10×10^{4}	35.31	1.308	3.38×10^{4}	2113	1057	264.2
in^3	16.39	0.01639	1.64×10^{-5}	1	5.79×10^{-4}	2.14×10^{-5}	0.5541	0.03463	0.01732	0.00433
ft^3	2.83×10^{4}	28.32	0.02832	1728	1	0.03704	957.5	69.84	29.92	7.481
yd^3	7.65×10^{5}	764.5	0.7646	4.67×10^{4}	27	1	2.59×10^{4}	1616	807.9	202.0
fl oz	29.57	0.02957	2.96×10^{-5}	1.805	0.00104	3.87×10^{-5}	1	0.06250	0.03125	0.00781
fl pt	473.2	0.4732	473×10^{-4}	28.88	0.01671	619×10^{-4}	16	1	0.6000	0.1250
fl qt	946.4	0.9463	9.46×10^{-4}	57.75	0.03342	0.00124	32	2	1	0.2500
gal	3785	3.786	0.00379	231.0	0.1337	0.00495	128	8	4	1

1.To convert from a unit shown in the left column, multiply by the factor listed in the column for the desired unit.

Length Conversion Table[1]

From/To	cm	m	km	in	ft	mile
cm	1	0.01	1×10^{-5}	0.3937	0.03281	6.214×10^{-6}
m	100	1	0.001	39.37	3.281	6.214×10^{-4}
km	1×10^{5}	1000	1	3.94×10^{4}	3281	0.6214
in	2.540	0.02540	2.540×10^{-5}	1	0.08333	1.578×10^{-5}
ft	30.48	0.3048	3.048×10^{-4}	12	1	18.94×10^{-4}
mile	1.609×10^{5}	1609	1.609	6.336×10^{4}	5280	1

1.To convert from a unit shown in the left column, multiply by the factor listed in the column for the desired unit.

GHS[1)] Symbols and their meaning

	Explosive Self Reactive Organic Peroxides	
	Flammable Self Reactive Pyrophorics	Self-Heating Emits Flammable Gas Organic Peroxide
	Acute Toxicity (severe)	
	Carcinogen Respiratory Sensitizer Reproductive Toxicity	Target Organ Toxicity Mutagenicity Aspiration Toxicity
	Environmental Toxicity	
	Oxidizer	
	Gases Under Pressure	
	Corrosives	
	Irritant Dermal Sensitizer Acute Toxicity(harmful)	Narconic Effects Respiratory Tract Irritation

1) GHS : Globally Hamonized System

The use of chemical products to enhance and improve life is a widespread practice worldwide. But alongside the benefits of these products, there is also the potential for adverse effects to people or the environment. As a result, a number of countries or organizations have developed laws or regulations over the years that require information to be prepared and transmitted to those using chemicals, through labels or Material Safety Data Sheets (MSDS). While these existing laws or regulations are similar in many respects, their differences are significant enough to result in different labels or MSDS for the same product in different countries. Given the reality of the extensive global trade in chemicals, and the need to develop national programs to ensure their safe use, transport, and disposal, it was recognized that a Globally harmonization system of classification and labeling of chemicals(GHS) would provide the foundation for such programs.

Solvent Quick Search Guide

Solvent Quick Search Guide

Solvent Quick Search Guide

High Purity Solvents

LC-MS
Ultimate
Pesticide
HPLC
DNA Biosynthesis
Ultra Dry

DUKSAN
PURE CHEMICALS

URL Address http://www.duksan.kr
E-mail Address Webmaster@duksan.kr

REAGENTS DUKSAN

HEAD OFFICE : 53, Sinwon-ro 133beongil, Danwon-gu, Ansan-si, Gyeonggi-do, Korea
TEL : +82-31-495-4055 FAX : +82-31-495-4058